

07/14/00
35715 U.S. PTO

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

07/14/00
35714 U.S. PTO
09/617440

Atty. Docket No. 03493.00084
IDS 2000-0403

Assistant Commissioner of Patents
Box Patent Applications
Washington, D.C. 20231

Enclosed herewith is a new patent application and the following papers:

First Named Inventor (or application identifier): **Jin-Meng Ho**
Wei Lin

Title of Invention: **RSVP/SBM BASED SIDE-STREAM SESSION SETUP, MODIFICATION,
AND TEARDOWN FOR QoS-DRIVEN WIRELESS LANS**

1. ☒ Specification 72 pages (including specification, claims, abstract) / 32 claims (2 independent - claims 1 and 17)
2. ☒ Declaration/Power of Attorney is:
☒ executed and attached.
☐ NOT included, but deferred under 37 C.F.R. § 1.53(f).
3. ☒ 13 Distinct sheets of ☒ Formal ☐ Informal Drawings (FIGS. 1-12b)
4. ☐ Preliminary Amendment.
5. ☐ Information Disclosure Statement
☐ Form 1449
☐ A copy of each cited prior art reference
6. ☒ Assignment with Cover Sheet.
7. ☐ Priority is hereby claimed under 35 U.S.C. § 119 based upon the following application(s):

Country	Application Number	Date of Filing (day, month, year)

8. ☐ Priority document(s).
9. ☐ Statement Claiming Small Entity Status.
10. ☐ Microfiche Computer Program (Appendix).
11. ☐ Nucleotide and/or Amino Acid Sequence Submission.
☐ Computer Readable Copy.
☐ Paper Copy (identical to computer copy).

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 2

Atty. Docket No. 03493.00084
IDS 2000-0403

☐ Statement verifying identity of above copies.

12. Calculation of Fees:

FEES FOR	EXCESS CLAIMS	FEE	AMOUNT DUE
Basic Filing Fee (37 C.F.R. § 1.16(a))			\$690.00
Total Claims in Excess of 20 (37 C.F.R. § 1.16(c))	12	18.00	\$216.00
Independent Claims in Excess of 3 (37 C.F.R. § 1.16(b))	0	78.00	\$0.00
Multiple Dependent Claims (37 C.F.R. § 1.16(d))	0	260.00	\$0.00
Subtotal - Filing Fee Due			\$906.00
REDUCE BY (%) (\$)			
Reduction by 50%, if Small Entity (37 C.F.R. §§ 1.9, 1.27, 1.28)	0		\$0.00
TOTAL FILING FEE DUE			\$906.00
Assignment Recordation Fee (if applicable) (37 C.F.R. § 1.21(h))	1	40.00	\$40.00
GRAND TOTAL DUE			\$946.00

13. PAYMENT is:

☒ included in the amount of the GRAND TOTAL by our enclosed checks. A general authorization under 37 C.F.R. § 1.25(b), second sentence, is hereby given to credit or debit our Deposit Account No. 19-0733 for the instant filing and for any other fees during the pendency of this application under 37 C.F.R. §§ 1.16, 1.17 and 1.18.

☐ not included, but deferred under 37 C.F.R. § 1.53(f).

14. All correspondence for the attached application should be directed to:

Samuel H. Dworesky, Esq.
AT&T Corp.
P. O. Box 4110
Middletown, New Jersey 07748

15. Other: _____

Date: July 14, 2000

By: _____

Joseph P. Curtin
Reg. No. 34,571

JPC/sgs

**RSVP/SBM BASED SIDE-STREAM SESSION SETUP, MODIFICATION, AND
TEARDOWN FOR QOS-DRIVEN WIRELESS LANS**

Inventors: Jin-Meng Ho and Wei Lin

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is related to application Serial No. (Atty docket IDS 2000-
5 0395), entitled An Architectural Reference Model for QoS-Driven Wireless LANs, invented
by J.-M. Ho, and filed concurrently with the present application; and to application Serial No.
(Atty docket IDS 2000-0396), entitled An In-Band QoS Signaling Reference Model for QoS-
Driven Wireless LANs, invented by W. Lin and J.-M. Ho, and filed concurrently with the
present application; and to application Serial No. (Atty docket IDS 2000-0397), entitled
10 Virtual Streams for QoS-Driven Wireless LANs, invented by J.-M. Ho and W. Lin, and filed
concurrently with the present application; and to application Serial No. (Atty docket IDS
2000-0398), entitled Admission Control for QoS-Driven Wireless LANs, invented by W. Lin
and J.-M. Ho, and filed concurrently with the present application; and to application Serial
No. (Atty docket IDS 2000-0399), entitled Frame Classification for QoS-Driven Wireless
15 LANs, invented by J.-M. Ho and W. Lin, and filed concurrently with the present application;
and to application Serial No. (Atty docket IDS 2000-0400), entitled Frame Scheduling for
QoS-Driven Wireless LANs, invented by J.-M. Ho and W. Lin, and filed concurrently with
the present application; and to application Serial No. (Atty docket IDS 2000-0401), entitled

IDS 2000-0403

RSVP/SBM Based Down-Stream Session Setup, Modification, and Teardown for QoS-Driven Wireless LANs, invented by J.-M. Ho and W. Lin, and filed concurrently with the present application; and to application Serial No. (Atty docket IDS 2000-0402), entitled RSVP/SBM Based Up-Stream Session Setup, Modification, and Teardown for QoS-Driven

- 5 Wireless LANs, invented by J.-M. Ho and W. Lin, and filed concurrently with the present application; and to application Serial No. (Atty docket IDS 2000-0404), entitled Enhanced Channel Access Mechanisms for QoS-Driven Wireless LANs, invented by J.-M. Ho, and filed concurrently with the present application; and to application Serial No. (Atty docket IDS 2000-0405), entitled Centralized Contention and Reservation Request for QoS-Driven
- 10 Wireless LANs, invented by J.-M. Ho and W. Lin, and filed concurrently with the present application; and to application Serial No. (Atty docket IDS 2000-0406), entitled Multipoll for QoS-Driven Wireless LANs, invented by J.-M. Ho and W. Lin, and filed concurrently with the present application; each of which is incorporated by reference herein. Additionally, the present application is related to application Serial No. (Atty docket IDS 1999-0408), entitled
- 15 Voice-Data Integrated Multiaccess By Self-Reservation and Blocked Binary Tree Resolution, invented by J.-M. Ho and filed June 19, 2000; and application Serial No. (Atty docket IDS 1999-0409), entitled Voice-Data Integrated Multiaccess By Self-Reservation and Stabilized Aloha Contention, invented by J.-M. Ho, and filed June 19, 2000, each of which is incorporated by reference herein.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to the fields of communications and networking. More particularly, the present invention relates to RSVP/SBM-based side-stream session setup,
5 modification and teardown for QoS-driven wireless networks.

2. Description of the Related Art

With the advent of digital broadband networks, such as hybrid fiber-coaxial networks and 3G/4G cellular networks, packetized multimedia services to residential and enterprise environments are becoming not only a reality, but also a necessity. Wireless delivery of, or
10 access to, multimedia applications, such as voice, video and data, is considered viable for helping accelerate this trend.

The transport of multimedia traffic over a shared network generally requires specific levels of quality of service (QoS) support for achieving predictable and satisfactory network service. Technically, QoS refers to the expectation of a session or an application to receive,
15 as well as the ability of a network to provide, a negotiated set of service values for data transmission in terms of delay/jitter bound, mean/maximum data rate, and the like. QoS is enforced and supported by such techniques as effective congestion control, adequate resource reservation, proper traffic shaping, and prioritized bandwidth allocation. With some degree of QoS guarantees, shared channels furnish time-bounded and asynchronous services that are
20 comparable to those of dedicated channels.

Bandwidth utilization efficiency is another important consideration in the design of a multimedia network. High bandwidth utilization efficiency leads to increased channel throughput and reduced access delay, thereby permitting the same channel bandwidth to serve more sessions/applications with given QoS levels. In the case of bandwidth shortage, maximizing bandwidth utilization efficiency minimizes the degradation of QoS values provided to active sessions/applications.

Unfortunately, wireless local-area networks (WLANs), such as currently specified by IEEE P802.11/1999, do not support QoS transport and operate on a distributed contention or simplified polling basis. Consequently, only asynchronous and low-throughput best-effort data services are provided.

What is needed is a technique for transforming a WLAN into part of an end-to-end QoS network having enhanced channel access, thereby providing QoS support with improved bandwidth utilization.

SUMMARY OF THE INVENTION

The present invention provides RSVP/SBM-based side-stream session setup, modification and teardown that support a QoS-driven WLAN. The advantages of the present invention are provided by a method and a system for setting up a side-stream communication session in a basic service set (BSS) in a wireless network so that the communication session has a defined Quality of Service (QoS). A first Path message and a first Resv message

(Path/Resv message) of a RSVP protocol are detected at a designated subnet bandwidth manager (DSBM) in a station having a point coordinator (PC). The first Resv message originates from a RSVP agent of a destination non-PC station in the BSS and requests resource reservation for setting up a side-stream session between a source non-PC station and

5 at least one destination non-PC station in the same BSS. The DSBM extracts a QoS parameter set and a classifier from the first Path/Resv message for the session. The DSBM then determines whether to admit the side-stream session to the network based on the QoS parameter set defining the session and a channel status report on a medium access control (MAC) sublayer of the BSS. When the side-stream session is admitted, a QoS management

10 entity (QME) of the PC station sets up a virtual side-stream (VSS) between the source non-PC station and the at least one destination non-PC station for transporting the side-stream session traffic. The DSBM is part of the QME in the PC station.

The QME assigns a virtual stream identifier (VSID) to the VSS, and instructs a frame scheduling entity (FSE) to create an entry corresponding to the VSS in a frame scheduling

15 table of the FSE. The FSE is logically located in the MAC sublayer of the PC station, and the entry in the frame scheduling table includes the VSID and the QoS parameter set associated with the side-stream session. A management frame containing information relating to a setup of the VSS defined by the VSID, the classifier, and the QoS parameter set is then sent from the PC station to the source non-PC station. The management frame is

20 received by the source non-PC station, and the information contained in the management

frame is passed to a QME of the non-PC station. The QME instructs a frame classification entity (FCE) to create an entry corresponding to the VSS in a frame classification table of the FCE. The FCE is logically located in the LLC sublayer of the non-PC station, and the entry in the frame classification table includes the VSID and the classifier associated with the side-stream session. The QME instructs a frame scheduling entity (FSE) to create an entry corresponding to the VSS in a frame scheduling table of the FSE. The FSE is logically located in the MAC sublayer of the non-PC station, and the entry in the frame scheduling table includes the VSID and the QoS parameter set associated with the side-stream session. A management frame containing information relating to a setup of the VSS defined by the VSID is then sent from the PC station to each destination non-PC station in the BSS.

The DSBM detects a second Path/Resv message that originates outside the DSBM and requests a change of at least one QoS parameter value associated with the side-stream session. The DSBM extracts the changed QoS parameter set and the classifier from the second Path/Resv message for the session. The QME of the PC station finds the VSID that is associated with the extracted classifier, and determines whether to grant the request for change based on the changed QoS parameter set and the channel status report. When the request is not granted, the side-stream session is operated according to the QoS parameter set contained in the frame scheduling table in the PC station for the VSS. When the request is granted, the QME of the PC station instructs the FSE of the PC station to update the entry in the frame scheduling table corresponding to the VSS by changing at least one QoS parameter

value associated with the VSS based on the requested change. When the request is granted, a management frame containing information relating to a change of at least one QoS parameter value associated with the side-stream session defined by the VSID is sent from the PC station to the source non-PC station. The management frame is received by the source non-PC station, and the information contained in the management frame is passed to the QME of the non-PC station. The QME of the non-PC station instructs the FSE of the non-PC station to update the entry corresponding to the VSS in the frame scheduling table of the FSE by changing at least one QoS parameter value associated with the VSS based on the information contained in the received management frame.

- 10 The DSBM detects a third Path/Resv message that originates outside the DSBM and requests that a side-stream session be terminated. The DSBM extracts the classifier from the third Path/Resv message for the session, and the QME of the PC station finds the VSID that is associated with the extracted classifier. The QME of the PC station instructs the FSE of the PC station to delete the entry corresponding to the VSS in the frame scheduling table. A
- 15 management frame containing information relating to a teardown of the VSS is sent from the PC station to the non-PC station sourcing the VSS defined by the VSID. The management frame is received by the source non-PC station, and the information contained in the management frame is passed to the QME of the non-PC station. The QME of the non-PC station instructs the FCE of the non-PC station to delete the entry corresponding to the VSS
- 20 in the frame classification table. Then, the QME of the non-PC station instructs the FSE of

the non-PC station to delete the entry corresponding to the VSS in the frame scheduling table. A third management frame containing information relating to a teardown of the VSS defined by the VSID is sent from the PC station to each destination non-PC station in the BSS.

- 5 The DSBM detects a timeout event that is triggered by a predetermined length of time elapsing and not receiving one of the first Path/Resv message and the second Path/Resv message for a side-stream session. The DSBM extracts classifier from one of the first Path/Resv message and the second Path/Resv message previously received for the side-stream session, and the QME of the PC station finds the VSID that is associated with the
- 10 extracted classifier. The QME of the PC station instructs the FSE of the PC station to delete the entry corresponding to the VSS in the frame scheduling table. A management frame containing information relating to a teardown of the VSS is sent from the PC station to the non-PC station sourcing the VSS defined by the VSID. The management frame is received at the source non-PC station, and the information contained in the management frame is
- 15 passed to the QME of the non-PC station. The QME of the non-PC station instructs the FCE of the non-PC station to delete the entry corresponding to the VSS in the frame classification table. The QME of the non-PC station also instructs the FSE of the non-PC station to delete the entry corresponding to the VSS in the frame scheduling table. A third management frame containing information relating to a teardown of the VSS defined by the VSID is sent from
- 20 the PC station to each destination non-PC station in the BSS.

BRIEF DESCRIPTION OF THE DRAWING

The present invention is illustrated by way of example and not limitation in the accompanying figures in which like reference numerals indicate similar elements and in

5 which:

Figure 1 shows an architectural reference model for QoS support in a basic service set (BSS) over a WLAN according to the present invention;

Figure 2 shows an in-band QoS signaling reference model for QoS support over a WLAN according to the present invention;

10 Figure 3 shows a diagram of virtual streams for QoS support over a WLAN according to the present invention;

Figure 4 shows a flow diagram for an admission control technique that can be used for QoS support in a WLAN according to the present invention;

15 Figure 5 depicts a process for classifying a frame that can be used in a QoS-driven WLAN according to the present invention;

Figure 6 shows an exemplary scheduling table that can be used for frame scheduling over a QoS-driven WLAN according to the present invention;

20 Figure 7 shows a signal path diagram for RSVP/SBM-based down-stream session setup, modification, and teardown over a QoS-driven WLAN according to the present invention;

Figure 8 shows a signal path diagram for an RSVP/SBM-based up-stream session setup, modification, and teardown over a QoS-driven WLAN according to the present invention;

Figure 9 shows a signal path diagram for RSVP/SBM-based side-stream session
5 setup, modification and teardown over a QoS-driven WLAN according to the present invention;

Figure 10 shows a diagram for enhanced channel access mechanisms over a QoS-driven WLAN according to the present invention;

Figures 11a-11c respectively show exemplary arrangements of a super frame, a
10 contention control frame and a reservation request frame that can be used for centralized contention and reservation request over a QoS-driven WLAN according to the present invention; and

Figures 12a and 12b respectively show exemplary arrangements for a superframe and a multipoll that can be used over a QoS-driven WLAN according to the present invention.

15

DETAILED DESCRIPTION

The present invention provides an architectural reference model that integrates the lower layers (link and PHY layers) of a WLAN, as currently specified by IEEE P802.11/1999, with the higher layers (network and higher layers) that appear in the ISO/IEC
20 basic reference model of Open Systems Interconnection (OSI) (ISO/IEC 7498-1), but not in

IEEE P802.11/1999. Both the IEEE P802.11/1999 and the ISO/IEC 7498-1 standards are incorporated by reference herein. Additionally, the present invention provides end-to-end QoS mechanisms. Such integration instills the QoS parameter values from the higher layers into the lower layers, and enables the lower layers to provide QoS traffic transport and improved channel throughput.

Compared to the existing reference model, as specified in IEEE P802.11/1999, the present invention introduces an admission control entity (ACE), a QoS management entity (QME), a frame classification entity (FCE), and a frame scheduling entity (FSE) for a point coordinator/access point (PC/AP) station (STA). The present invention also introduces a QoS signaling entity (QSE), a QoS management entity (QME), a frame classification entity (FCE), and an optional frame scheduling entity (FSE) for a non-PC/AP STA. The ACE and the QSE may each be part of the QME. Further, the present invention introduces a Virtual Stream (VS) Update management frame for exchange of VS management information between a PC/AP STA and a non-PC/AP STA.

Figure 1 shows an architectural reference model for QoS support in a basic service set (BSS) over a WLAN according to the present invention. Figure 1 shows an exemplary BSS that includes a PC/AP STA and two non-PC/AP STAs x and y. While only two non-PC/AP STAs are shown in Figure 1, it should be understood that any number of non-PC/AP STAs could be part of the BSS shown in Figure 1.

The PC/AP STA shown in Figure 1 includes an admission control entity (ACE) that is part of a QoS management entity (QME). Alternatively, the ACE can be a separate entity that operates in conjunction with the QME. The PC/AP STA also includes a frame classification entity (FCE) that is logically located in a logical link control (LLC) sublayer of the PC/AP STA. The QME interfaces with the FCE, which maintains a frame classification table containing frame classifiers that are used for identifying QoS parameter values associated with a frame. The PC/AP STA further includes a frame scheduling entity (FSE) logically located at a medium access control (MAC) sublayer of the PC/AP STA. The QME interfaces with the FSE, which maintains a frame scheduling table that contains scheduling information for scheduling transmission of frames. The PC/AP STA includes a conventional station management entity (SME), which is separate from the QME. The SME interfaces with a conventional MAC sublayer management entity (MLME) and a conventional physical layer management entity (PLME). The MLME interfaces with the MAC sublayer, whereas the PLME interfaces with a physical layer. The physical layer comprises a conventional physical layer convergence protocol (PLCP) sublayer and a conventional physical medium dependent (PMD) sublayer.

Each non-PC/AP STA includes a local QME that interfaces with a local FCE. The local FCE is logically located at the LLC sublayer of the non-PC/AP STA and maintains a local frame classification table. Each non-PC/AP STA optionally includes a local FSE (shown in a dotted border) that, when included in the non-PC/AP STA, is logically located at

the MAC sublayer of the non-PC/AP STA, and maintains a local frame scheduling table for the non-PC/AP STA. Each non-PC/AP STA includes a conventional station management entity (SME), which is separate from the local QME. The SME of the non-PC/AP STA interfaces with a conventional MLME and a conventional PLME. The MLME interfaces
 5 with the MAC sublayer, whereas the PLME interfaces with a physical layer. The physical layer comprises a conventional physical layer convergence protocol (PLCP) sublayer and a conventional physical medium dependent (PMD) sublayer.

End-to-end QoS signaling messages of a session or an application (session/application) are generated by the QSEs of STAs in a BSS of a WLAN and/or from
 10 outside the BSS. The end-to-end QoS signaling messages may indicate whether a session/application is being set up, modified, or torn down. The ACE of the PC/AP STA, which may include a module for resource control and a module for policy control (not separately shown in Figure 1), exchanges end-to-end QoS signaling messages with the QSEs in the BSS and/or other QoS signaling counterparts outside the BSS that are transparent to
 15 the lower layers. Based on the end-to-end QoS signaling messages and local policy, the ACE makes an admission control decision for a session/application that is being set up.

When a session/application is admitted, the resource reserved for the admission will be reflected in the ACE, whereas the QME of the PC/AP STA establishes virtual streams (VSs) for transporting the session/application traffic from a local LLC sublayer entity to one
 20 or more peer LLC entities. Established VSs become active VSs and are identified by virtual

stream identifiers (VSIDs). The QME of the PC/AP STA further extracts a frame classifier(s) from the end-to-end QoS messages for each admitted session/application, where a frame classifier is a set of classification parameters that can be used for identifying the QoS parameter values associated with the frame. Exemplary classification parameters include IP
 5 classification parameters, LLC classification parameters and IEEE802.1 P/Q parameters.

The QME of the PC/AP STA passes to the FCE of the PC/AP STA the VSID and the corresponding frame classifier that are defined for the down-stream traffic (traffic from PC/AP STA to non-PC/AP STA) of a newly admitted session/application. The FCE adds the VSID and classifier that are defined for the down-stream, up-stream (from non-PC/AP STA
 10 to PC/AP STA) and side-stream (from non-PC/AP STA to non-PC/AP STA) traffic to the classification table, which is a table of all active classifiers that are paired with or contain VSIDs arranged in a defined order. The QME of the PC/AP STA also passes to the FSE of the PC/AP STA the VSID and the corresponding QoS parameter values. Logically, the FSE maintains the VSIDs and associated QoS parameter values, plus other information, such as
 15 data size, in a scheduling table.

Further, the QME of the PC/AP STA causes the PC/AP STA to send a management frame, referred to as a VS Update frame, to each non-PC/AP STA participating in a newly admitted session/application. The VS Update management frame contains information, such as VSID, frame classifier, VS Action (i.e., Add VS) and QoS parameter values, that defines
 20 the down-stream, up-stream or side-stream traffic of the session/application. After a non-

PC/AP STA receives the information contained in a VS Update management frame and passes the information to its local QME, the local QME relays to the local FCE of the non-PC/AP STA the VSID and classifier, and to the local FSE (if any) of the non-PC/AP STA the VSID and QoS parameter values, for the up-stream or side-stream traffic.

- 5 An FCE, whether located within the PC/AP STA or a non-PC/AP STA, classifies frames passed down to the LLC sublayer to a VSID. The FSE of the PC/AP STA schedules transmission opportunities (TOs) for frames classified to specific VSIDs based on the QoS parameter values associated with the VSIDs. The FSE of a non-PC/AP STA chooses data frames from its active VSs based on the QoS parameter values of those particular VSs for
- 10 transmission over the TOs scheduled by the PC/AP STA.

- When the QME of the PC/AP STA detects from end-to-end QoS signaling messages received by the ACE a change of QoS parameter values for an admitted session/application, the ACE makes a new admission control decision regarding the “changed” QoS parameter values. When the change cannot be accepted, the QME takes no action for the PC/AP STA
- 15 and the non-PC/AP STAs participating in the session/application. When the change is accepted, the resource reserved for the modified QoS parameter values will be reflected in the ACE, and the QME updates the FSE of the PC/AP STA with the new QoS parameter values using the admitted VSIDs for the session/application. The QME further causes the PC/AP STA to send another VS Update management frame to each non-PC/AP STA
- 20 participating in the modified session/application. The VS Update frame contains information

relating to the admitted VSID, the VS Action (i.e., Modify VS), and the new QoS parameter values. After a participating non-PC/AP STA receives a second type of VS Update frame, and the non-PC/AP STA passes the information contained therein to its local QME. The local QME updates the local FSE (if any) of the non-PC/AP STA with the VSID and the
5 modified QoS parameter values for the up-stream or side-stream traffic of the session/application. Subsequently, the FSEs of both the PC/AP STA and the non-PC/AP STA (if any) schedule VS transmissions based on the modified QoS parameter values.

When the QME of the PC/AP STA detects from end-to-end QoS signaling messages received by the ACE a termination of an admitted session/application, the resource released
10 by the termination will be reflected in the ACE, whereas the QME identifies the particular VSIDs established for the session/application. The QME of the PC/AP STA instructs the FCE of the PC/AP STA to remove from the classification table the VSID and the corresponding frame classifier associated with the down-stream traffic of the session/application. The QME of the PC/AP STA also instructs the FSE of the PC/AP STA
15 to remove from the scheduling table the VSIDs and the corresponding QoS parameter values associated with the session/application. Further, the QME of the PC/AP STA causes the PC/AP STA to send another VS Update management frame to each non-PC/AP STA participating in the session/application. The VS Update management frame now contains information relating to VSID and a VS Action (i.e., Delete VS) that defines the down-stream,
20 up-stream, or side-stream traffic of the session/application. After a non-PC/AP STA receives

the information contained in the VS Update management frame and passes the information to its local QME, the local QME instructs the local FCE of the non-PC/AP STA to remove from the local classification table the entry containing the VSID admitted for the up-stream or side-stream traffic of the session/application. The QME also instructs the FSE (if any) of the

5 non-PC/AP STA to remove from the local scheduling table the entry containing the VSID.

The present invention also allows a non-PC/AP STA to send a VS Update management frame to the PC/AP STA for requesting a setup, modification or termination of a session/application, while keeping admission/policy control and central scheduling at the PC/AP STA. The local QME of the non-PC/AP STA causes the transmission of such a VS

10 Update frame, which does not contain a VSID, or contains a special VSID, in the case of setup request. The PC/AP STA receives the VS Update management frame and passes the information contained therein to the QME of the PC/AP STA. The ACE takes appropriate action based on the information contained in the VS Update management frame, whereas the QME of the PC/AP STA causes the PC/AP STA to send a VS Update management frame

15 back to the non-PC/AP STA. When the request is granted, the return VS Update management frame contains the same information as the VS Update management frame originated by the PC/AP STA as if the request were initiated by the PC/AP STA itself. When the request is rejected, the return VS Update management frame contains the information that the VSID indicated in the original request, in addition to a VS Action (i.e.,

20 Reject VS). The ability that a non-STA can initiate such a request is especially useful when

end-to-end QoS messages and session/application traffic go to or come from a non-PC/AP STA through a portal or a bridge, but not through the PC/AP STA.

The present invention also provides an in-band QoS signaling reference model that can be incorporated into the architectural reference model of the present invention for enabling a WLAN to support conventional network in-band QoS signaling protocols, such as IETF Diffserv and IEEE 802.1P/Q. Such in-band signaling provides QoS support through layer 3 (as in IETF Diffserv) or layer 2 (as in IEEE 802.1 P/Q) tagging mechanisms. Generally, tagging does not reserve network resources in advance, and is effected through standardized combination patterns of certain bits in a data packet or frame. These combination patterns identify a reduced set of QoS parameters such as flow type and priority level associated with the data traffic.

Figure 2 shows an in-band QoS signaling reference model for QoS support over a WLAN according to the present invention. More specifically, Figure 2 shows a STA that includes a QME, an FCE that is logically located in the LLC sublayer of the STA and an FSE that is logically located in the MAC sublayer of the STA. The FSE may be optional in a non-PC/AP STA. The QME interfaces with the FCE and the FSE, when present.

End-to-end QoS values expected by a new in-band QoS signaling session, together with the corresponding frame classifier, are extracted directly from a data frame of the new session. In particular, when the FCE of a STA finds a data frame—the first data frame—of a

new session that cannot be classified using the current classification table, the FCE passes the frame to the QME of the STA.

In the case of a PC/AP-STA, as applicable to down-stream traffic (traffic from a PC/AP STA to a non-PC/AP STA), the QME examines the frame for obtaining the QoS parameter values and classifier characterizing the new down-stream session. The QME also establishes a virtual down-stream (VDS) for transporting the session traffic from the local LLC sublayer entity to one or more peer LLC entities, and assigns a VSID to the newly-established VDS. The QME then passes to the FCE the VSID and the corresponding frame classifier defined for the new down-stream session. The FCE adds the VSID and classifier to its classification table. The QME also passes to the FSE such VSID and the corresponding QoS parameter values. Logically, the FSE maintains the VSID and associated QoS parameter values, plus other information such as data size, in an entry of its scheduling table. Further, the QME of the PC/AP STA causes the PC/AP STA to send a management frame, such as a VS Update management frame, to each non-PC/AP STA participating in the new session in the BSS of the PC/AP STA. The VS Update management contains information, such as VSID, VS Action (i.e., Add VDS), that defines the down-stream session.

In the case of a non-PC/AP-STA, as applicable to up-stream and side-stream traffic (traffic from a non-PC/AP STA to a PC/AP STA or a non-PC/AP STA), the QME examines the frame for obtaining the QoS parameter values and classifier characterizing the new up-stream or side-stream session. The QME of the non-PC/AP STA then causes the non-PC/AP

STA to send a management frame, such as a VS Update management frame, to the PC/AP STA of the BSS containing the non-PC/AP STA. The VS Update management frame contains information, such as special VSID, VS Action (i.e., Add VUS or VSS), frame classifier, and QoS parameter values, that defines the up-stream or side-stream session. After

5 the PC/AP STA receives the information contained in the VS Update management frame and passes the information to the QME of the PC/AP STA, the QME establishes a virtual up-stream (VUS) or a virtual side-stream (VSS) for transporting the session traffic between LLC entities, and assigns a VSID to the established VUS or VDS. The QME then passes to the FSE of the PC/AP STA the VSID and the corresponding QoS parameter values. Further, the

10 QME of the PC/AP STA causes the PC/AP STA to return a management frame, such as a VS Update management frame, to the non-PC/AP STA starting the new up-stream or side-stream session in the BSS. The VS Update management contains information, such as assigned VSID, VS Action (i.e., Add VUS or VSS), frame classifier, and QoS parameter values, that defines the up-stream or side-stream session. After the non-PC/AP STA receives

15 the information contained in the VS Update management frame from the PC/AP STA and passes the information to the local QME of the non-PC/AP STA, the QME relays to the local FCE of the non-PC/AP STA the VSID and classifier, and to the local FSE (if present) of the non-PC/AP STA the VSID and QoS parameter values, defined for the up-stream or side-stream session.

The FCE shown in Figure 2 classifies frames passed down to the LLC sublayer to a VSID using its classification table. The FSE of the PC/AP STA schedules transmission opportunities (TOs) for frames classified to specific VSIDs based on the QoS parameter values associated with the VSIDs. The FSE of a non-PC/AP STA chooses data frames from its active VSs based on the QoS parameter values of those VSs for transmission over the TOs scheduled by the PC/AP STA.

Besides the classification function, the FCE also maintains a timer for each entry of its classification table for detecting termination of a session. When a data frame is classified successfully using a specific entry, the FCE resets the corresponding timer to a predetermined value. When the timer expires before the entry is used for classifying another data frame, the FCE passes that particular entry to the QME of the same STA and then deletes the entry from its classification table. The QME obtains the VSID contained in the entry, and instructs the local FCE of the same STA to remove the VSID together with the corresponding QoS parameter values from the scheduling table. In the case when the timeout event occurs at the PC/AP STA, as applicable to a down-stream session, the QME of the PC/AP STA further causes the PC/AP STA to send a VS Update management frame to each non-PC/AP STA participating in the session in the BSS. The VS Update management frame contains information such as VSID and VS Action (i.e., Delete VDS) that defines the down-stream session. After an addressed non-PC/AP STA receives the information contained in the VS Update management frame and passes the information to its local QME, the local QME

causes the non-PC/AP STA to remove any information related to this VDS. In the situation when the timeout event occurs at a non-PC/AP STA, as applicable to an up-stream or side-stream session, the QME of the non-PC/AP STA further causes the non-PC/AP STA to send a VS Update management frame to the PC/AP STA. The VS Update management frame contains information such as VSID and VS Action (i.e., Delete VUS or VSS) that defines the up-stream or side-stream session. After the PC/AP STA receives the information in the VS Update management frame from the non-PC/AP STA and passes the to the QME of the PC/AP STA, the QME instructs the FSE of the PC/AP STA to remove from the scheduling table the entry containing the VSID.

10 The present invention also provides virtual streams (VSs) over a QoS-driven WLAN that can be set up by the QME of a PC in a BSS of a WLAN for transporting, under defined QoS constraints, the traffic of an admitted session/application from a local LLC entity to one or more peer LLC entities in the same BSS. VSs are torn down by the QME of the PC/AP STA when the underlying session or application is terminated.

15 Logically, a VS is a unidirectional path between a STA sourcing the VS and one or more other STAs receiving the VS in the BSS. A VS amounts to an identifiable, ordered sequence of data frames for transport within a BSS using a specified set of QoS parameter values. A VS identifier (VSID) is assigned by the QME of a PC/AP STA for identifying the VS upon the setup of the VS. A VSID is local to, and unique within, a given BSS. A VS is defined by a triple of VSID, VS source station address, VS destination station address, and is

20

characterized by a set of QoS parameter values. A VS has no predefined relationship to higher-layer concepts, such as stream, flow, connection or session. A VS exists solely within a BSS, or more precisely, within the MAC sublayer of a WLAN. An appropriate VSID is inserted into each QoS data frame passed down to the LLC sublayer for transmission via a FCE, which is logically located in the LLC sublayer, and removed upon reception at the receiver LLC sublayer before the frame is passed up to the higher layer. Each VSID is associated by the QME of the PC/AP STA with a set of QoS parameter values for the scheduling of frame transmission by an FSE logically located in the MAC sublayer.

Figure 3 shows a diagram of different types of virtual streams for QoS support over a WLAN according to the present invention. A VS can be a unitcast VS or a multicast VS. A unitcast VS is used for transporting data frames from one STA to another STA within the same BSS, while a multicast VS is used for transporting data frames from one STA to multiple STAs within the same BSS. A VS can further be a virtual down-stream (VDS), a virtual up-stream (VUS), or a virtual side-stream (VSS). A VDS is used for transporting data from the PC/AP STA in a BSS to one or more non-PC/AP STAs in the same BSS. A VUS is used for transporting data from a non-PC/AP STA in a BSS to the PC/AP STA in the same BSS. A VSS is used for transporting data from a non-PC/AP STA in a BSS to at least another non-PC/AP STA in the same BSS.

The QoS parameter values associated with each VSID, that is, the QoS parameter values expected by the session/application traffic to be served by the VS, may be changed in

the course of the session/application, as signaled by end-to-end QoS messages and approved by the QME of the PC/AP STA. VSs are allocated bandwidth by the FSE of the PC/AP STA in terms of transmission opportunities (TOs) in accordance with the associated QoS parameter values for transporting data frames classified to the VSs.

5 A QoS parameter set may be defined by parameters, such as acknowledgment policy, flow type (continuous/periodic or discontinuous/bursty), priority level, privacy information, delay bound, jitter bound, minimum data rate, mean data rate, maximum data burst, with the latter two parameters further relating to the token replenishment rate and bucket size of a token bucket often used in describing or shaping incoming traffic. A STA may support
10 multiple VSs with different sets of QoS values. In response to a TO, a non-PC/AP STA may transmit data from different VSs that the non-PC/AP station sources other than the VS specifically assigned bandwidth, as seen fit by its local FSE based on the QoS values of the active VSs sourced by the STA.

 The present invention also provides a technique for implementing admission control
15 over a QoS-driven WLAN that does macro bandwidth management for QoS traffic transport over the MAC sublayer on a session-by-session basis. According to this aspect of the invention, admission control is performed by an ACE that is logically part of a QME of a PC/AP STA. The QME in turn interfaces with an FCE that is logically located in the LLC sublayer of the PC/AP STA and an FSE that is logically located in the MAC sublayer of the
20 PC/AP STA.

Admission control is based on new bandwidth request and current bandwidth availability and accounts for the MAC and PHY overheads. Bandwidth is partitioned into two spaces, one space for sessions/applications of a continuous/periodic flow type and the space for sessions/applications of a discontinuous/bursty flow. In general, the continuous/periodic flow type is time sensitive and requires real-time service, while the discontinuous/bursty flow type is time tolerant and has a relatively lower priority. The FSE of the PC/AP STA of a given BSS provides feedback for every superframe through a channel status service primitive to the ACE, similar to a DSBM used with the RSVP QoS protocol, providing information with respect to the current contention-free period (CFP), such as the useable bandwidth and the used bandwidth, respectively, for both the continuous and discontinuous flow types of traffic.

When a new bandwidth request is received for a session/application of a continuous flow type, the request will be granted only when there is adequate bandwidth still unused so that admission of the new session/application will meet its QoS requirement and while not degrading the performance of already admitted sessions/applications. When the unused bandwidth is not sufficient for supporting the new session/application, but adequate bandwidth that is being used for the discontinuous flow type can be preempted for serving the new session/application, then the new request can also be granted with the consequence of degrading some or all existing sessions/applications of a discontinuous flow type. When a new bandwidth request is received for a session/application of a discontinuous flow type, the

request will be granted provided that the sum of the unused bandwidth plus the used bandwidth for a discontinuous flow type having a lower priority level than the priority level of the new session/application is sufficient for honoring the new request.

In any case, bandwidth reservation may be based on the bursty characteristics of the traffic concerned, as quantified by the token rate and bucket size of the token bucket mechanism, or on the mean data rates using only the taken rate of the token bucket. For example, suppose that the effective channel rate (accounting for the MAC and PHY overheads) is C ; that the time duration of each superframe, which comprises of a CFP and a contention period (CP) as defined by IEEE P802.11/1999, is T ; that the mean data rate of a session is represented by the token rate R ; and the maximum data burst of a session is given by the bucket size B . The bandwidth requirement in terms of the channel time per CFP for such a session will be $(R \cdot T + B)/C$ for traffic burstiness based admission, and $R \cdot T/C$ for mean rate based admission, assuming appropriate units for C , T , R and B .

Figure 4 shows a flow diagram 400 for an admission control technique that can be used for QoS support in a WLAN according to the present invention. At step 401, the type of traffic flow is determined in response to a request for bandwidth for a new session/application. If, at step 401, the traffic type is a continuous flow traffic type, flow continues to step 402 where it is determined whether there is sufficient unused bandwidth available for allocating to the requesting session/application. If, at step 402, there is sufficient unused bandwidth, flow continues to step 403 where the request is granted.

5
10

15

20

change. According to this aspect of the present invention, frame classification is performed by a frame classification entity (FCE) that is logically located in the LLC sublayer of a station. After a frame has been classified, frame scheduling of the classified frame is performed by a frame scheduling entity (FSE) that is logically located in the MAC sublayer.

- 5 Both the FCE and the FSE are interfaced to a QoS management entity (QME) that contains an ACE or a QoS signaling entity (QSE).

Frame classification finds appropriate virtual stream identifiers (VSIDs) to label frames passed down to the LLC sublayer by examining frames against classifiers in a classification table. The VSIDs are linked by the QME to specific sets of QoS parameter values for use by the FSE to schedule the transfer of frames between LLC entities. Via a QME or a VS UPDATE management frame, VSIDs are established to correspond with classifiers and sets of QoS parameter values for an admitted session/application. Prior to the start of the session/application, paired VSIDs and classifiers are provided to the classification table of the FCE, while paired VSIDs and sets of QoS parameter values are provided to the scheduling table of the FSE.

Classifier entries are placed in the classification table in the order of descending search priority values. A classifier entry in the classification table is comprised of a VSID, a search priority, and classifier parameters. The classifier parameters may be IP classifier parameters, LLC classifier parameters, or IEEE 802.1 P/Q parameters. The IP classifier parameters are parameters such as IP TOS Range/Mask, IP Protocol, IP Source

Address/Mask, IP Destination Address/Mask, TCP/UDP Source Port Start, TCP/UDP Source Port End, TCP/UDP Destination Port Start, and TCP/UCP Destination Port End. The LLC classifier parameters are parameters such as Source MAC Address, Destination MAC Address, and Ethertype/SAP. The IEEE 802.1P/Q parameters are such parameters as 802.1P
5 Priority Range and 802.1Q VLAN ID. When a frame is classified successfully in the order of descending search priorities using one or more of the classifier parameters contained in an entry, the VSID value contained in the first matched entry provides the VSID to designate the QoS parameter set for the resulting MAC service primitive used for passing the classified frame to the MAC sublayer, or otherwise the frame is indicated as a best-effort
10 (asynchronous) frame.

Figure 5 depicts a process for classifying a frame that can be used in a QoS-driven WLAN according to the present invention. A frame 501 that has been passed down to the LLC sublayer of a station from a higher layer in the station is received by the QME of the station. The QME examines the frame for information included in the received frame that is
15 included in at least one of the classifier parameters in at least one of the classifier entries in a classification table 502. The QME examines the entries in the classification table in the order of descending search priorities when classifying the received frame. The VSID value contained in the first matched entry is used for identifying the VS 503 and the corresponding QoS parameter set for transporting the data frame between peer LLC entities of the BSS.

004720"0440"04400

The present invention also provides a technique for implementing frame scheduling over a QoS-driven WLAN that does micro bandwidth management for QoS traffic transport over the MAC sublayer in all directions of a given basic service set (BSS) on a superframe-by-superframe basis. According to this aspect of the invention, frame scheduling is performed by a frame scheduling entity (FSE) that is logically located in the MAC sublayer of a PC/AP, which can be possibly assisted by a FSE of a non-PC station, in the BSS. Frame scheduling is based on the classification results, as expressed in a virtual stream identifier (VSID) for a QoS frame or in a best-effort priority value for a non-QoS frame, of an FCE that is logically located in the LLC sublayer of the PC/AP or a station associated with the PC.

10 Frame scheduling is thus guided by the QoS parameter values associated by the QME of the PC/AP with each classified VSID, the QoS parameter values being null for a best-effort priority value.

Frame scheduling schedules transfer during the contention-free period (CFP), between peer LLC entities, of frames passed down to the MAC sublayer of all the stations, including that the LLC entity within a PC/AP, in the BSS. A virtual central queue or scheduling table is formed at the PC/AP so that a QoS queuing or scheduling algorithm can be adapted for scheduling the service (i.e., transfer) of the frames queued in actuality or by prediction at the PC/AP or non-PC stations associated with the PC/AP. Figure 6 shows an exemplary scheduling table that can be used for frame scheduling over a QoS-driven WLAN

20 according to the present invention. The table includes entries for queuing the traffic of

admitted down-stream sessions (i.e., traffic to be transmitted from the PC/AP) and the traffic of admitted up-stream and side-stream sessions (i.e., traffic to be transmitted from non-PC stations) in the BSS.

An entry for the PC/AP is always present for the transfer of the traffic from the PC/AP to non-PC stations associated with the PC/AP. An entry for each non-PC station in the BSS is automatically created when the non-PC station is associated with the PC/AP for serving the best-effort traffic from that station. An entry is also created for each VS when the VS is set up by the QME of the PC/AP for transporting the traffic of a newly-admitted session. When a VS is torn down by the QME because the session is terminated, the entry corresponding to the torn-down VS is removed from the frame scheduling table. For QoS traffic, each entry includes the VSID and QoS parameter values supporting the session, as well as a size for the data on the corresponding VS. QoS entries in the table may be ordered in descending priority levels associated with the VSIDs corresponding to the entries.

For a virtual down-stream (VDS) (or for the PC/AP), the size value of an entry is updated when the size on the VDS (or for the best-effort down-stream traffic from the PC) waiting for transmission is changed. For a virtual up-stream (VUS) or a virtual side-stream (VSS) of continuous/periodic flow type, as indicated in the corresponding QoS parameter set, the size value of the entry is derived from the appropriate QoS values for the VUS or VSS, such as mean data rate and maximum data burst as defined by the token bucket mechanism. The size value of an entry may be changed to reflect the real size as piggybacked by the

transmitting station in a frame. For a VUS or a VSS of discontinuous/bursty flow type (or for the best-effort traffic of a non-PC station), the size value of the entry is provided and updated by the sending station through either a reservation request or a piggybacking. For traffic policing or for congestion control, the maximum data size transmitted from a VS over

5 a certain time interval, such as a superframe time, T may be restricted by the token bucket mechanism to $R \cdot T + B$, assuming appropriate units for R , T and B , where R and B are the token rate and bucket size of the token bucket.

With a central scheduling table, the FSE of the PC/AP can schedule transmission opportunities (TOs) in the CFP for queued traffic based on the data size in each entry and

10 based on other QoS parameter values stored in each entry, such as priority level, delay bound, and jitter bound. A TO is defined by a nominal start time and a maximum duration time. A non-PC station may also form a local scheduling table pertaining to traffic that is to be transmitted from the station, so that the local FSE of the non-PC station can choose data from appropriate VUSs or VSSs under it for transmission in response to a given TO. When

15 allocating TOs for queued traffic, the FSE of the PC/AP will also consider the allocation of centralized contention opportunities (CCOs) used in centralized contention by non-PC stations in the BSS for sending a reservation request when a new burst of frames arrives in an empty buffer at the station. Such consideration is based on a centralized contention algorithm.

The present invention also provides RSVP/SBM-based down-stream session setup, modification and teardown over a QoS-driven WLAN and the corresponding service interfaces. A down-stream session is defined herein to be a data flow, supported by a particular transport-layer protocol, originating from a user outside a given BSS of a wireless LAN, passed through a PC/AP of the BSS, and destined to one or more stations within the BSS. Figure 7 shows a signal path diagram for RSVP/SBM-based down-stream session setup, modification, and teardown over a QoS-driven WLAN according to the present invention.

A user outside a BSS initiates a down-stream session by having its RSVP agent send out Path messages of the RSVP signaling protocol. The Path messages are propagated to a designated subnet bandwidth manager (DSBM) located in the PC/AP of the BSS. The DSBM in turn sends Path messages to the subnet bandwidth manager (SBM) of each station to receive the session inside the BSS. After the SBM of a destination station receives the messages, the SBM of the destination station begins resource reservation by sending Resv messages of the RSVP signaling protocol back to the DSBM. The DSBM then performs admission control with respect to the down-stream traffic transfer in the BSS of the down-stream session. The DSBM further sends appropriate Resv messages back to the session sender based on the outcome of its admission decision. Path messages and Resv messages for a given session are sent periodically by the session sender and receiver(s), and may be changed in the course of a session. The DSBM also responds to the change by sending out

appropriate Resv messages. Path messages and Resv messages are transparent to the LLC and MAC sublayers.

In particular, when the DSBM detects new Path/Resv messages of the RSVP signaling protocol for a down-stream session to be set up, the DSBM extracts the QoS parameter values and the classifier from the messages. The DSBM then makes an admission decision on the session based on such factors as policy control and resource control, with resource availability information being provided periodically by the FSE of the PC/AP, which is logically of the MAC sublayer. When the session fails to pass the admission control, the DSBM rejects the session. When the session is admitted, the QME of the PC/AP sets up a new virtual down-stream (VDS) for transporting the down-stream session traffic. That is, the QME establishes a VSID for the VDS. The QME then instructs the FCE to create an entry for the VSID and classifier defining the session in the classification table of the FCE. The QME also instructs the FSE to create an entry for the VSID and QoS parameter values defining the session in the scheduling table of the FSE. Further, the QME instructs the MAC sublayer management entity (MLME) to issue a management frame, VS Update, for transmission to each of the stations to receive the session in the same BSS. The VS Update frame in this situation contains information such as VSID and VS Action (Add VDS) for the down-stream session.

When the DSBM detects a change of an admitted down-stream session from the Path/Resv messages of the RSVP signaling protocol for the session, the DSBM extracts the

new QoS values defining the session from the messages, and decides whether to honor the modified QoS request. When the modification cannot be accepted, the session remains active under the previous QoS values. When the modification is accepted, the QME of the PC/AP modifies the VDS serving the session to reflect the changed QoS values associated
5 with the VDS. That is, the QME instructs the FSE to update the scheduling table with the new QoS values for the entry created for the session as identified by the established VSID.

When the DSBM detects a termination of an admitted down-stream session from either the Path/Resv messages of the RSVP protocol or a timeout indication for the session, the QME of the PC/AP tears down the VDS established for the session/application. That is,
10 the QME matches the classifier defining the session/application to the VSID for the VDS. The QME then instructs the FCE to delete the entry for the VSID and classifier defining the session/application from the classification table. The QME also instructs the FSE to delete the entry of the VSID and QoS values defining the session/application from the scheduling table. Further, the QME instructs the MLME to send another VS Update frame to each
15 station receiving the session/application in the same BSS. The VS Update contains information such as VSID and VS Action (i.e., Delete VDS) for the session.

The present invention also provides an RSVP/SBM-based up-stream session setup, modification and teardown over a QoS-driven WLAN and the corresponding service interfaces. An up-stream session is defined herein to be a data flow, supported by a
20 particular transport-layer protocol, that originates from a station inside a given BSS of a

wireless LAN, passed through a PC/AP of the BSS, and destined to one or more users outside the BSS. Figure 8 shows a signal path diagram for an RSVP/SBM-based up-stream session setup, modification, and teardown over a QoS-driven WLAN according to the present invention.

- 5 A station inside a given BSS initiates an up-stream session by having its SBM send out Path messages of the RSVP signaling protocol. The Path messages are sent to the DSBM located in the PC/AP of the BSS. The DSBM in turn sends the Path messages to the RSVP agent of each user that is to receive the session outside the BSS. After a destination RSVP agent receives the messages, the destination RSVP agent begins resource reservation by
- 10 sending Resv messages of the RSVP signaling protocol back to the DSBM. The DSBM then performs an admission control operation with respect to the up-stream traffic transfer in the BSS of the up-stream session on behalf of the SBM of the session sender. The DSBM further sends appropriate Resv messages back to the session sender based on the outcome of the admission decision. The Resv messages sent back to the session sender are for
- 15 confirmation only, and do not require the recipient, i.e., the SBM of the sending station, to perform resource reservation for the up-stream traffic of the station, as would be the case with the conventional RSVP signaling protocol. Path messages and Resv messages for a given session are sent periodically by the session sender and receiver(s), and may be changed in the course of a session. The DSBM also responds to a change by sending out appropriate
- 20 Resv messages, to which the recipient (again the SBM of the sending station) will not take

any resource reservation action in response. Path messages and Resv messages are transparent to the LLC and MAC sublayers.

In particular, when the DSBM detects new Path/Resv messages of the RSVP signaling protocol for an up-stream session to be set up, the DSBM extracts the QoS parameter values and the classifier from the messages, and makes an admission decision on the session based on factors such as policy control and resource control, with resource availability information being provided periodically by the FSE that is logically located in the MAC sublayer of the PC/AP. When the session fails to pass the admission control, the DSBM rejects the session. When the session is admitted, the QME of the PC/AP sets up a new virtual up-stream (VUS) for transporting the up-stream session traffic. That is, the QME establishes a virtual stream identifier (VSID) for the VUS. The QME then instructs the FSE of the PC/AP to create an entry for the VSID and QoS parameter values defining the session in the scheduling table of the FSE. Further, the QME instructs the MLME (MAC sublayer management entity) of the PC/AP to issue a management frame, VS Update, for transmission to the station initiating the session. The VS Update frame in this case contains information such as VSID, frame classifier, VS Action (i.e., Add VUS), and QoS parameter values for the up-stream session. Once the addressed station receives the VS Update frame, its local QME instructs the local FCE to create an entry for the VSID and frame classifier defining the session in the local classification table. The local QME also instructs the local FSE to create

an entry for the VSID and QoS parameter values defining the session in the local scheduling table.

When the DSBM detects a change of an admitted up-stream session from the Path/Resv messages of the RSVP signaling protocol for the session, the DSBM extracts the new QoS parameter values defining the session from the messages, and determines whether to honor the modified QoS request. When the modification cannot be accepted, the session will remain active under the previous QoS parameter values. When the modification is accepted, the QME of the PC/AP modifies the VUS serving the session to reflect the changed QoS parameter values associated with the VUS. That is, the QME of the PC/AP instructs the FSE of the PC/AP to update the scheduling table with the new QoS parameter values for the entry created for the session, as identified by the established VSID. The QME further instructs the MLME of the PC/AP to issue another VS Update frame to the station initiating the session. The VS Update frame in this situation contains information such as VSID, VS Action (i.e., Modify VUS), and new QoS parameter values for the session. Once the station initiating the session receives the VS Update frame, its local QME instructs the local FSE to update the entry of the VSID defining the session in the local scheduling table with the new QoS parameter values.

When the DSBM detects a termination of an admitted up-stream session from either the Path/Resv messages of the RSVP protocol or a timeout indication for the session, the QME of the PC/AP tears down the VUS established for the session. That is, the QME of the

PC/AP matches the classifier defining the session to the VSID for the VUS. The QME of the PC/AP then instructs the FSE of the PC/AP to delete the entry of the VSID and QoS parameter values defining the session from the scheduling table. Further, the QME instructs the MLME of the PC/AP to send another VS Update frame to the station initiating the session. This particular VS Update contains information such as VSID and VS Action (i.e., Delete VUS) for the session. Once the station initiating the session receives the VS Update frame, its local QME instructs the local FCE to delete the entry of the VSID and classifier defining the session from the local classification table. The QME also instructs the local FSE to delete the entry of the VSID and QoS parameter values defining the session from the local scheduling table.

The present invention also provides RSVP/SBM-based side-stream session setup, modification and teardown over a QoS-driven WLAN and the corresponding service interfaces. A side-stream session is defined herein to be a data flow, supported by a particular transport-layer protocol, that originates from a station inside a given BSS of a wireless LAN and destined directly to one or more stations within the BSS. The data flow may also be destined to any user outside the BSS through a PC/AP of the BSS. Figure 9 shows a signal path diagram for RSVP/SBM-based side-stream session setup, modification, and teardown over a QoS-driven WLAN according to the present invention.

A station inside a given BSS initiates a side-stream session by having its SBM send out Path messages of the RSVP signaling protocol. The Path messages are sent to the DSBM

located in the PC/AP of the BSS. The DSBM in turn sends Path messages to the RSVP agent of each user intended to receive the session outside the BSS, and to the SBM of each station intended to receive the session inside the BSS. After a destination RSVP agent receives the messages, the destination RSVP agent begins resource reservation by sending

5 Resv messages of the RSVP signaling protocol back to the DSBM of the PC/AP. The SBM of each destination station within the BSS also begins resource reservation by sending its own Resv messages back to the DSBM of the PC/AP. The DSBM of the PC/AP then performs an admission control operation with respect to the side-stream traffic transfer in the BSS of the side-stream session on behalf of the SBM of the session sender. The DSBM

10 further sends appropriate Resv messages back to the session sender based on the outcome of the admission decision. The Resv messages are for confirmation only, and do not require the recipient, i.e., the SBM of the sending station, to perform resource reservation for the side-stream traffic of the station, as would be the case with the conventional RSVP signaling protocol. Path messages and Resv messages for a given session are sent periodically by the

15 session sender and receiver(s), and may be changed in the course of a session. The DSBM of the PC/AP also responds to the change by sending out appropriate Resv messages, to which the recipient (again, the SBM of the sending station) will not take any resource reservation action in response. Path messages and Resv messages are transparent to the LLC and MAC sublayers.

In particular, when the DSBM detects new Path/Resv messages of the RSVP signaling protocol for a side-stream session to be set up, the DSBM extracts the QoS parameter values and the classifier from the messages, and makes an admission decision on the session based on factors such as policy control and resource control, with resource availability information being provided periodically by the FSE of the MAC sublayer in the PC/AP. When the session fails to pass the admission control, the DSBM rejects the session. When the session is admitted, the QME of the PC/AP sets up a new virtual side-stream (VSS) for transporting the side-stream session traffic. That is, the QME of the PC/AP establishes a virtual stream identifier (VSID) for the VSS. The QME then instructs the FSE of the PC/AP, which is logically part of the MAC sublayer, to create an entry for the VSID and QoS parameter values defining the session in the scheduling table of the FSE. Further, the QME instructs the MLME of the PC/AP to issue a management frame, VS Update, for transmission to the station initiating the session. The VS Update frame in this situation contains information such as VSID, frame classifier, VS Action (i.e., Add VSS), and QoS parameter values for the side-stream session. Once the station initiating the session receives the frame, its local QME instructs the local FCE to create an entry for the VSID and frame classifier defining the session in the local classification table. The local QME also instructs the local FSE to create an entry for the VSID and QoS parameter values defining the session in the local scheduling table. Additionally, the QME of the PC/AP instructs the MLME of the PC/AP to issue a management frame, VS Update, for transmission to each station

intended to receive the session in the same BSS. The VS Update frame in this situation contains information such as VSID and VS Action (i.e., Add VSS) for the side-stream session.

When the DSBM detects a change of an admitted side-stream session from the

5 Path/Resv messages of the RSVP signaling protocol for the session, the DSBM extracts the new QoS parameter values defining the session from the messages, and determines whether to honor the modified QoS request. When the modification cannot be accepted, the session will remain active under the previous QoS parameter values. When the modification is accepted, the QME of the PC/AP modifies the VSS serving the session to reflect the changed

10 QoS parameter values associated with the VSS. That is, the QME of the PC/AP instructs the FSE of the PC/AP to update the scheduling table with the new QoS values for the entry created for the session, as identified by the established VSID. The QME of the PC/AP further instructs the MLME of the PC/AP to issue another VS Update frame to the station initiating the session. The VS Update frame in this situation contains information such as

15 VSID, VS Action (i.e., Modify VSS), and new QoS parameter values for the session. Once the addressed station receives the frame, its local QME instructs the local FSE to update the entry of the VSID defining the session in the local scheduling table with the new QoS parameter values.

When the DSBM detects a termination of an admitted side-stream session from either

20 the Path/Resv messages of the RSVP protocol or a timeout indication for the session, the

QME of the PC/AP tears down the VSS established for the session. That is, the QME of the PC/AP matches the classifier defining the session to the VSID for the VSS. The QME of the PC/AP then instructs the FSE of the PC/AP to delete the entry of the VSID and QoS parameter values defining the session from the scheduling table. Further, the QME instructs the MLME of the PC/AP to send another VS Update frame to the station initiating the session. In this situation, the VS Update frame contains information such as VSID and VS Action (i.e., Delete VSS) for the session. Once the addressed station receives the VS Update frame, its local QME instructs the local FCE to delete the entry of the VSID and classifier defining the session from the local classification table. The local QME also instructs the local FSE to delete the entry of the VSID and QoS parameter values defining the session from the local scheduling table. Additionally, the QME of the PC/AP instructs the MLME of the PC/AP to send another VS Update frame to each station receiving the session in the same BSS. The VS Update frame contains information such as VSID and VS Action (i.e., Delete VSS) for the session.

The present invention also provides enhanced channel access mechanisms over a QoS-driven WLAN that greatly improve QoS capability and channel utilization on a wireless LAN over simple polling and distributed contention schemes as defined by IEEE P802.11/1999. Channel access according to the present invention is driven by QoS parameter values that are associated with admitted sessions/applications. Specifically, downstream traffic (from a PC/AP STA to at least one non-PC/AP STA) is given TOs directly by

the FSE of the PC/AP STA in a given BSS of a WLAN based on the corresponding set of QoS parameter values, such as delay bound and mean data rate for the down-stream traffic. Up-stream and side-stream traffic (from a non-PC/AP STA to the PC/AP STA or a non-PC/AP STA) of a continuous/periodic flow type is allocated TOs periodically by the FSE of the PC/AP STA also in accordance with the corresponding set of QoS parameter values for the up-stream and side-stream traffic. Up-stream and side-stream traffic of a discontinuous/bursty flow type is allocated TOs only when there is data buffered at non-PC/AP stations for transmission, with the allocation further being subject to the QoS parameter values. Consequently, channel bandwidth is not idled away due to inactive stations, as would be the case when all the stations associated with the PC/AP STA were polled for data transmission, regardless of the respective flow type of their traffic. QoS based channel access according to the present invention also allows higher priority traffic to be transferred, an important mechanism, especially in the case of inadequate bandwidth.

The channel access mechanisms of the present invention include a centralized contention and reservation request scheme that is carried out under the control of a point coordination function (PCF) contained in the PC/AP STA, in addition to a conventional distributed contention scheme that is under the control of a conventional distributed coordination function (DCF) contained equally in every STA, as described in IEEE P802.11/1999. The channel access mechanisms of the present invention further include a multipoll scheme that announces multiple TOs in a single frame under the PCF, in contrast to

the simple poll scheme that announces one TO in one frame, as provided by IEEE P802.11/1999.

According to this aspect of the invention, non-PC/AP stations use centralized contention for sending a reservation request (RR) to the PC for channel bandwidth allocation

5 when a non-PC/AP stations have a new burst of data frames to transmit (to the PC/AP STA or/and other stations). In each "contention-free period" (CFP) under the PCF, zero, one or multiple centralized contention intervals (CCIs) may be selected by the PC for centralized contention. The length of each CCI is expressed in units of centralized contention opportunities (CCOs), and is also determined by the PC. The number of available CCIs and

10 the length of each CCI are announced by the PC/AP STA in a contention control (CC) frame.

A station, if permitted to send an RR, sends an RR into any one of the available CCOs following a CC frame. Stations that successfully sent an RR frame in a given CCI will be identified in the next CC frame sent by the PC/AP STA. Such positive indication may also be effected in the form of a TO given to the transmission of the data burst for which an RR

15 was sent. Stations that did not successfully send an RR frame in a given CCI may retry in the next CCI.

The phrase "contention-free period" loosely corresponds to a conventional "contention period" (CP), as defined in IEEE P802.11/1999. In contrast to the present invention, CP refers to distributed contention as operating under the DCF of IEEE

20 P802.11/1999, whereas CFP of the present invention implies no such contention, but can

have centralized contention under the PCF. Centralized contention enables a PC, or an FSE inside the PC/AP STA, to have complete control of channel bandwidth such that the period seized by non-PC/AP STAs for contention is determined by the PC in advance, as opposed to distributed contention by which STAs can seize the channel for an unpredictable duration and thereby may lock up channel access for other contending sessions/applications. The centralized contention of the present invention also allows the PC to optimize the bandwidth allocation for such contention so that channel throughput is increased while access delay is reduced, compared to distributed contention. This is because the PC can maintain a global history of the contention outcome of all the stations, and thus can optimally estimate the bandwidth need for centralized contention and conflict resolution for previous contention, whereas a station using distributed contention contends based on the local knowledge of its own contention history and thus cannot optimize the overall contention algorithm. Moreover, with centralized contention, stations send only RRs of very short length and only once for a new burst, while with distributed contention stations send data frames of much larger length and may have to contend several times for each data burst because a data burst generally needs to be decomposed into a number of data frames that do not exceed a predefined size. Therefore, the present invention yields much less contention intensity and, hence, much higher channel throughput and lower access delay, than a conventional distributed contention technique.

A multipoll is sent by the PC/AP STA for conveying a sequence of TOs to one or more non-PC/AP stations for up-stream and/or side-stream transmission. A multipoll also specifies the length of each TO. This technique of the present invention is particularly useful when direct station-to-station communication is involved, thereby avoiding the situation that data frames need to be sent to the PC/AP STA first and then back to the destination non-PC/AP STA(s).

Figure 10 is a diagram showing enhanced channel access mechanisms over a QoS-driven WLAN according to the present invention. Figure 10 shows a superframe having a contention free period (CFP), a conventional contention period (CP) and exemplary frames illustrating the enhanced channel access mechanisms of the present invention. A superframe is demarcated by a target beacon transmission time (TBTT). Subsequent to the TBTT, a PC/AP STA transmits a beacon frame, as defined by IEEE P802.11/1999. A short inter-frame space (SIFS) occurs after the transmission of each frame in the CFP, also as defined by IEEE P802.11/1999.

Next in Figure 10, a down-stream frame D2 is sent from a PC/AP STA to a non-PC/AP STA. The down-stream frame includes a poll for the destination non-PC/AP STA for sending upstream traffic to the PC/AP STA. The polled non-PC/AP STA responds with an up-stream frame U2 that contains user or management data and an acknowledgement to the poll.

004720"0744009517440

An exemplary multipoll frame is shown next that conveys a sequence of TOs for non-PC STA(s) to send traffic. In this case, there is a sequence of four TOs that are identified by the multipoll. The first TO has been allocated to VS13 or a different VS sourced by a non-PC/AP STA and is used for sending data frames classified to VS13. The second TO has
5 been allocated to VS31 or a different VS sourced by a non-PC/AP STA and is used for sending data frames classified to VS31. The third TO has been allocated to a non-PC/AP STA and is used by the non-PC/AP STA to send a delayed acknowledgement (Dly-Ack) that acknowledges receipt of frames identified in the Dly-Ack frame by the non-PC/AP STA at some previous time. The fourth TO has been allocated to VS28 or a different VS sourced by
10 a non-PC/AP STA and is used for sending data frames classified to VS28. Traffic is sent into each respective TO. Subsequent to the TOs, the PC/AP STA sends an acknowledgement frame with a poll. The acknowledgement frame acknowledges correct reception of a frame sent immediately before the acknowledgement frame by a non-PC/AP STA (i.e., the frame from VS28 according to the illustration in Figure 10), and the poll polls a destination non-
15 PC/AP STA for sending upstream or sidestream traffic. The polled non-PC/AP STA, STA 4, responds by sending a data frame to STA 5 (S45).

The CFP then includes a CC frame identifying three CCOs that can be used by non-PC STAs having new bursts of traffic of a discontinuous/bursty flow type or of a best effort/asynchronous nature to transmit for sending an RR. The CC frame also includes
20 information relating to the identification of non-PC/AP STAs that successfully sent an RR in

a preceding CCI to the PC/AP STA, so that these non-PC STAs can determine whether an RR needs to be re-sent in the next CCI. An RR is sent for having bandwidth allocated for transmitting the burst of traffic, as defined above, that arrives at a non-PC/AP STA for transmission. In the exemplary arrangement of Figure 10, a single RR is sent into the first CCO, no RR is sent into the second CCO, and two colliding RRs are sent into the third CCO. Following the CCOs, the PC/AP STA sends a down-stream frame D1 with a poll, and the polled non-PC/AP STA responds with an up-stream frame U1 in which an acknowledgement is included.

In the exemplary arrangement of the superframe shown in Figure 10, a second CC frame is sent from the PC/AP STA indicating available CCOs and acknowledging receipt of a frame immediately prior to the transmission of the CC frame. As shown in Figure 10, a RR is sent into the first available CCO whereas another RR is sent into the second available CCO. In the illustration of Figure 10, these two RRs collided in the third CCO of the preceding CCI, but they are now sent without collision and each received correctly by the PC/AP STA, thereby successfully resolving a collision. Lastly, a contention free (CF) end frame is sent indicating the end of the CFP and the beginning of the conventional CP in the current superframe.

The present invention also provides a technique for implementing centralized contention and reservation request over a QoS-driven WLAN that enables stations of a given BSS to report to a PC/AP of the BSS in an efficient way arrivals of new QoS or best-effort

traffic bursts awaiting transmission. The FSE of the PC/AP can then place such information in its scheduling table for allocating transmission opportunities (TOs) for sending the data bursts.

Centralized contention is controlled by the PC/AP, and occurs in the “contention-free period” (CFP) of a superframe, as shown in Figure 11a, in contrast to a conventional contention-period (CP) that is used for conventional distributed contention. According to the invention, centralized contention occurs in well defined centralized contention intervals (CCIs). Each CCI is always preceded by a contention control (CC) frame that is broadcast by the PC/AP (or by a CC frame containing an acknowledgment to the last data frame received by the PC). Each CCI contains a number of centralized contention opportunities (CCOs) for sending reservation request (RR) frames. Subject to certain centralized contention rules, stations send their respective RR frames using CCOs. There may be zero, one, or more CCIs in a given CFP, with the number of CCOs in each CCI selected, as seen fit by the FSE in consultation with the scheduling table maintained by the FSE of the PC/AP and the centralized contention algorithm in use. A centralized contention algorithm determines the desired length of the following CCI in units of CCOs, based on the contention outcome (i.e., the number of idle, successful, and colliding CCOs) in the preceding CCI and on the estimate of the number of stations generating a new RR frame since the last CCI.

A CC frame, such as shown in Figure 11b, contains information, such as a priority limit, a CCI length, a permission probability (PP), and feedback entries. The priority limit

specifies the minimum priority level of a virtual up-stream or a virtual side-stream having a new data burst for transmission that has a privilege to trigger its sourcing station to send an RR frame on its behalf in the following CCI. A CCI length is expressed in terms of the CCOs contained in the CCI. A PP is used for reducing contention when the available CCI

5 length is shorter than the optimum CCI length, and is calculated in such cases by dividing the available CCI length by the optimum CCI length. Otherwise, the PP is set to unity. Stations having an obligation and a privilege to send an RR frame first check against the PP to test whether they are permitted to contend for sending an RR frame. These particular stations independently generate a number from a random variable uniformly distributed over the

10 interval (0,1). When a station generates a number smaller than the PP, the station is permitted to contend, and not otherwise. Permitted stations independently and in a random fashion select one of the available CCOs and send their RR frames using their selected CCOs. The feedback entries contain the VSIDs or AIDs for which an RR frame was correctly received by the PC/AP during the last CCI. Stations that find no such positive

15 feedback during the CC frame will retry to send an RR frame during the next CCI under the centralized contention rules applied to that the next CCI, unless a station is offered prior to the start of the next CCI a transmission opportunity (TO) for the virtual stream (VS), resulting in the sending of the RR frame.

An RR frame, such as shown in Figure 11c, primarily contains information, such as a

20 data size of the VS for which the RR frame is being sent, and a VSID identifying the VS, or a

data size of the best-effort traffic and the AID of the sending station. A station generates an RR frame when a new burst of data is classified to one of its sourced VSs for transmission. A station may also send an RR frame using a TO allocated to the station. RR frames are generally much shorter than data frames, and hence considerably reduce contention and
5 improve channel performance in comparison with cases where all data frames are sent by contention as under the conventional distributed contention function (DCF) of IEEE P802.11/1999.

The present invention provides a technique for implementing multipoll over a QoS-driven WLAN that allows for transmissions from a sequence of virtual up-streams (VUSs) and virtual side-streams (VSSs) at one or more stations by a single poll. According to the
10 invention, such a multipoll scheme extends the conventional simple poll scheme that allows for transmission from only one station per poll, as defined by IEEE P802.11/1999, thus greatly improving bandwidth utilization efficiency of wireless medium. The approach of the present invention is particularly useful when direct station-to-station communication is
15 involved because data frames need not to be sent to a PC/AP first and then back to the destination station(s).

A multipoll is sent by a PC/AP during the CFP of a superframe when it is desirable to allocate a sequence of transmission opportunities (TOs) to various stations for sequential up-stream and/or side-stream data transmissions. A multipoll frame is primarily formed based
20 on poll records arranged in the order of their occurrence, with each poll record further

comprised of a VSID (or AID, association ID) and a duration time. The VSID identifies a VUS/VSS sourced by the station that is receiving a TO from a particular poll record, or the AID of the station in situations when the TO is for a station sourcing no active VUSs/VSSs.

The duration time of a TO specifies the maximum length of the TO. The first TO starts a SIFS period after the multipoll frame ends, and each successive TO starts when the preceding TO limit expires. Alternatively, a TO starts a SIFS period after the station using the preceding TO sends a data frame that is indicated to be the final frame from that station for its poll record, when the station using the second-in-time TO detects such an indication. That is, when a station does not detect the transmission termination, as indicated by the preceding station, the station starts its transmission within TO allocated to the station. When a station detects such a termination before the preceding TO is fully utilized, the station may start early, but cannot use the leftover duration time in addition to the full duration of TO allocated to the station. In such a situation, the PC/AP does not take any action to reclaim the unused channel time. When some stations do not completely use their TOs allocated in a multipoll, the last station may end its transmission prior to the nominal expiry time, and the unused channel time is then returned to the PC/AP for reallocation.

A station, in response to a poll record containing a VSID, may transmit data from the indicated VUS/VSS or, alternatively, from a different one, as determined by its local FSE based on the QoS parameter values of the active VUSs/VSSs sourced by the station. When a poll record contains an AID, the station having the AID transmits data completely based on

the decision of its local FSE, again, in accordance with the QoS parameter values of the active VUSs/VSSs.

Figure 12a shows an exemplary arrangement of a superframe having a contention free period (CFP), a conventional contention period (CP) and an exemplary arrangement of frames. The superframe of Figure 12a is demarcated by a target beacon transmission time (TBTT). Subsequent to the TBTT, a PC/AP STA transmits a beacon frame, as defined by IEEE P802.11/1999. A short inter-frame space (SIFS) occurs after the transmission of each frame in the CFP, also as defined by IEEE P802.11/1999.

Next in Figure 12a, a down-stream frame D2 is sent from a PC/AP STA to a non-PC/AP STA. The down-stream frame includes a poll for the destination non-PC/AP STA for sending upstream traffic to the PC/AP STA. The polled non-PC/AP STA responds with an up-stream frame U2 that contains user or management data and an acknowledgement to the poll.

An exemplary multipoll frame is shown next that conveys a sequence of TOs for non-PC STA(s) to send traffic. In this case, there is a sequence of five TOs that are identified by the multipoll. The first TO has been allocated to VS13 or a different VS sourced by a non-PC/AP STA and is used for sending data frames classified to VS13. The second TO has been allocated to VS31 or a different VS sourced by a non-PC/AP STA and is used for sending data frames classified to VS31. The third TO has been allocated to a non-PC/AP STA and is used by the non-PC/AP STA to send a delayed acknowledgement (Dly-Ack) that

acknowledges receipt of frames identified in the Dly-Ack frame by the non-PC/AP STA at some previous time. The fourth TO has been allocated to VS28 or a different VS sourced by a non-PC/AP STA and is used for sending data frames classified to VS28. The fifth TO has been allocated to VS4 or a different VS sourced by a non-PC/AP STA and is used for sending data frames classified to VS4. Traffic is sent into each respective TO. Subsequent to the TOs, the PC/AP STA sends an acknowledgement frame with a poll. The acknowledgement frame acknowledges correct reception of a frame sent immediately before the acknowledgement frame by a non-PC/AP STA (i.e., the frame from STA 4 according to the illustration in Figure 12a), and the poll polls a destination non-PC/AP STA for sending up-stream or side-stream traffic. The polled non-PC/AP STA, STA 4, responds by sending a data frame to STA 5 (S45). Lastly, a contention free (CF) end frame is sent indicating the end of the CFP and the beginning of the conventional CP in the current superframe.

While the present invention has been described in connection with the illustrated embodiments, it will be appreciated and understood that modifications may be made without departing from the true spirit and scope of the invention.

What is claimed is:

- 1 1. A method for setting up a side-stream communication session in a basic
2 service set (BSS) in a wireless network, the communication session having a defined Quality
3 of Service (QoS), the method comprising steps of:
4 detecting a first Path message and a first Resv message (Path/Resv message)
5 of a RSVP protocol at a designated subnet bandwidth manager (DSBM) in a station having a
6 point coordinator (PC), the first Resv message originating from a RSVP agent of a
7 destination non-PC station in the BSS and requesting resource reservation for setting up a
8 side-stream session between a source non-PC station and at least one destination non-PC
9 station in the same BSS;
10 extracting at the DSBM a QoS parameter set and a classifier from the first
11 Path/Resv message for the session;
12 determining at the DSBM whether to admit the side-stream session to the
13 network based on the QoS parameter set defining the session and a channel status report on a
14 medium access control (MAC) sublayer of the BSS;
15 when the side-stream session is admitted, setting up by a QoS management
16 entity (QME) of the PC station a virtual side-stream (VSS) between the source non-PC
17 station and the at least one destination non-PC station for transporting the side-stream session
18 traffic; the DSBM being part of the QME in the PC station.

1 2. The method according to claim 1, further comprising steps of:
2 assigning by the QME a virtual stream identifier (VSID) to the VSS; and
3 instructing by the QME a frame scheduling entity (FSE) to create an entry
4 corresponding to the VSS in a frame scheduling table of the FSE, the FSE being logically
5 located in the MAC sublayer of the PC station, the entry in the frame scheduling table
6 including the VSID and the QoS parameter set associated with the side-stream session.

1 3. The method according to claim 2, further comprising a step of sending a
2 management frame from the PC station to the source non-PC station, the management frame
3 including information relating to a setup of the VSS defined by the VSID, the classifier, and
4 the QoS parameter set.

1 4. The method according to claim 3, further comprising steps of:
2 receiving the management frame by the source non-PC station;
3 passing the information contained in the management frame to a QME of the
4 non-PC station;
5 instructing by the QME a frame classification entity (FCE) to create an entry
6 corresponding to the VSS in a frame classification table of the FCE, the FCE being logically
7 located in the LLC sublayer of the non-PC station, the entry in the frame classification table
8 including the VSID and the classifier associated with the side-stream session; and

9 instructing by the QME a frame scheduling entity (FSE) to create an entry
10 corresponding to the VSS in a frame scheduling table of the FSE, the FSE being logically
11 located in the MAC sublayer of the non-PC station, the entry in the frame scheduling table
12 including the VSID and the QoS parameter set associated with the side-stream session.

1 5. The method according to claim 4, further comprising steps of:
2 sending a management frame from the PC station to each destination non-PC
3 station in the BSS, the management frame including information relating to a setup of the
4 VSS defined by the VSID.

1 6. The method according to claim 2, further comprising steps of:
2 detecting a second Path/Resv message at the DSBM, the second Path/Resv
3 message originating outside the DSBM and requesting a change of at least one QoS
4 parameter value associated with the side-stream session;
5 extracting at the DSBM the changed QoS parameter set and the classifier from
6 the second Path/Resv message for the session;
7 finding at the QME of the PC station the VSID that is associated with the
8 extracted classifier;
9 determining at the QME of the PC station whether to grant the request for
10 change based on the changed QoS parameter set and the channel status report;

11 when the request is not granted, operating the side-stream session according to
12 the QoS parameter set contained in the frame scheduling table in the PC station for the VSS;
13 and

14 when the request is granted, instructing by the QME of the PC station the FSE
15 of the PC station to update the entry in the frame scheduling table corresponding to the VSS
16 by changing at least one QoS parameter value associated with the VSS based on the
17 requested change.

1 7. The method according to claim 6, wherein when the request is granted, further
2 comprising steps of:

3 sending a management frame from the PC station to the source non-PC
4 station, the management frame including information relating to a change of at least one QoS
5 parameter value associated with the side-stream session defined by the VSID.

1 8. The method according to claim 7, further comprising steps of:

2 receiving the management frame by the source non-PC station;

3 passing the information contained in the management frame to the QME of
4 the non-PC station; and

5 instructing by the QME of the non-PC station the FSE of the non-PC station
6 to update the entry corresponding to the VSS in the frame scheduling table of the FSE by

7 changing at least one QoS parameter value associated with the VSS based on the information
8 contained in the received management frame.

1 9. The method according to claim 2, further comprising steps of:
2 detecting a third Path/Resv message at the DSBM, the third Path/Resv
3 message originating outside the DSBM and requesting that a side-stream session be
4 terminated;
5 extracting at the DSBM the classifier from the third Path/Resv message for
6 the session;
7 finding at the QME of the PC station the VSID that is associated with the
8 extracted classifier;
9 instructing by the QME of the PC station the FSE of the PC station to delete
10 the entry corresponding to the VSS in the frame scheduling table;
11 sending a management frame from the PC station to the non-PC station
12 sourcing the VSS defined by the VSID, the management frame including information relating
13 to a teardown of the VSS.

1 10. The method according to claim 9, further comprising steps of:
2 receiving the management frame by the source non-PC station;

3 passing the information contained in the management frame to the QME of
4 the non-PC station;

5 instructing by the QME of the non-PC station the FCE of the non-PC station
6 to delete the entry corresponding to the VSS in the frame classification table; and

7 instructing by the QME of the non-PC station the FSE of the non-PC station
8 to delete the entry corresponding to the VSS in the frame scheduling table.

1 11. The method according to claim 9, further comprising a step of sending a third
2 management frame from the PC station to each destination non-PC station in the BSS, the
3 third management frame including information relating to a teardown of the VSS defined by
4 the VSID.

1 12. The method according to claim 9, further comprising steps of:
2 detecting a timeout event at the DSBM, the timeout event being triggered by a
3 predetermined length of time elapsing and not receiving one of the first Path/Resv message
4 and the second Path/Resv message for a side-stream session;
5 extracting at the DSBM the classifier from one of the first Path/Resv message
6 and the second Path/Resv message previously received for the side-stream session;
7 finding at the QME of the PC station the VSID that is associated with the
8 extracted classifier;

9 instructing by the QME of the PC station the FSE of the PC station to delete
10 the entry corresponding to the VSS in the frame scheduling table;
11 sending a management frame from the PC station to the non-PC station
12 sourcing the VSS defined by the VSID, the management frame including information relating
13 to a teardown of the VSS.

1 13. The method according to claim 12, further comprising steps of:
2 receiving the management frame at the source non-PC station;
3 passing the information contained in the management frame to the QME of
4 the non-PC station;
5 instructing by the QME of the non-PC station the FCE of the non-PC station
6 to delete the entry corresponding to the VSS in the frame classification table; and
7 instructing by the QME of the non-PC station the FSE of the non-PC station
8 to delete the entry corresponding to the VSS in the frame scheduling table.

1 14. The method according to claim 13, further comprising a step of sending a
2 third management frame from the PC station to each destination non-PC station in the BSS,
3 the third management frame including information relating to a teardown of the VSS defined
4 by the VSID.

1 15. The method according to claim 1, wherein before the step of detecting the
2 Resv message at the DSBM, the method comprises steps of:
3 receiving the first Path message for the side-stream session at the DSBM, the
4 first Path message being sent from a subnet bandwidth manager (SBM) of the source non-PC
5 station in the BSS, the SBM being part of the QME in the non-PC station;
6 propagating the first Path message for the side-stream session from the DSBM
7 to an RSVP agent of each destination station, the RSVP agent being an SBM when the
8 destination station is a non-PC station in the BSS;
9 receiving the first Resv message for the side-stream session at the DSBM, the
10 first Resv message being sent from an RSVP agent of a destination station, the RSVP agent
11 being an SBM when the destination station is a non-PC station in the BSS;
12 wherein after the step of determining at the DSBM whether to admit the side-
13 stream session to the network, the method further comprises a step of sending the first Resv
14 message for the session from the DSBM to the SBM of the source non-PC station in the BSS.

1 16. The method according to claim 1, wherein the wireless network is a wireless
2 local area network (WLAN).

1 17. A point coordinator (PC) station in a basic service set (BSS) in a wireless
2 network, the PC station comprising:

3 a designated subnet bandwidth manager (DSBM) detecting a first Path
4 message and a first Resv message (Path/Resv message) of a RSVP protocol, the first Resv
5 message originating from a RSVP agent of a destination non-PC station in the BSS and
6 requesting resource reservation for setting up a side-stream session between a source non-PC
7 station and at least one destination non-PC station in the same BSS, the DSBM extracting a
8 Quality of Service (QoS) parameter set and a classifier from the first Path/Resv message for
9 the session, and determining whether to admit the side-stream session to the network based
10 on the QoS parameter set defining the session and a channel status report on a medium
11 access control (MAC) sublayer of the BSS; and
12 a QoS management entity (QME) responsive to the admitted side-stream
13 session by setting a virtual side-stream (VSS) for transporting the side-stream session traffic
14 between the source non-PC station and the at least one destination non-PC station, the
15 DSBM being part of the QME in the PC station.

1 18. The PC station according to claim 17, wherein the PC station includes a frame
2 scheduling entity (FSE) having a frame scheduling table, the FSE being logically located in a
3 MAC sublayer of the PC station, and
4 wherein the QME assigns a virtual stream identifier (VSID) to the VSS, and
5 instructs the FSE to create an entry corresponding to the VSS in the frame scheduling table of

6 the FSE, the entry in the frame scheduling table including the VSID and the QoS parameter
7 set associated with the side-stream session.

1 19. The PC station according to claim 18, wherein the QME sends a management
2 frame from the PC station to the source non-PC station, the management frame including
3 information relating to a setup of the VSS defined by the VSID, the classifier, and the QoS
4 parameter set.

1 20. The PC station according to claim 19, wherein the source non-PC station
2 includes a local QME, a local FCE that is logically located in the LLC sublayer of the source
3 non-PC station and a local FSE that is logically located in the MAC sublayer of the source
4 non-PC station, the source non-PC station receiving the management frame and passing the
5 information contained in the management frame to the local QME,

6 wherein the source non-PC station receives the management frame and passes
7 the information contained in the management frame to the local QME,

8 wherein the local QME instructs the local FCE to create an entry
9 corresponding to the VSS in the frame classification table of the FCE, the entry in the frame
10 classification table including the VSID and the classifier associated with the side-stream
11 session; and

12 wherein the local QME instructs the local FSE to create an entry
13 corresponding to the VSS in the frame scheduling table of the FSE, the entry in the frame
14 scheduling table including the VSID and the QoS parameter set associated with the side-
15 stream session.

21. The PC station according to claim 20, wherein the non-PC station sends a management frame to each destination non-PC station in the BSS, the management frame including information relating to a setup of the VSS defined by the VSID.

1 22. The PC station according to claim 18, wherein the DSBM detects a second
2 Path/Resv message, the second Path/Resv message originating outside the DSBM and
3 requesting a change of at least one QoS parameter value associated with the side-stream
4 session, the DSBM extracting the changed QoS parameter set and the classifier from the
5 second Path/Resv message for the session, and

6 wherein the QME of the PS station finds the VSID that is associated with the
7 extracted classifier, and determines whether to grant the request for change based on the
8 changed QoS parameter set and the channel status report,

9 wherein when the request is not granted, side-stream session is operated
10 according to the QoS parameter set contained in the frame scheduling table in the PC station
11 for the VSS, and

12 wherein when the request is granted, the QME of the PC station instructs the
13 FSE of the PC station to update the entry in the frame scheduling table corresponding to the
14 VSS by changing at least one QoS parameter value associated with the VSS based on the
15 requested change.

1 23. The PC station according to claim 22, wherein when the request is granted,
2 the PC station sends a management frame to the source non-PC station, the management
3 frame including information relating to a change of at least one QoS parameter value
4 associated with the side-stream session defined by the VSID.

1 24. The PC station according to claim 23, wherein the source non-PC station
2 includes a local QME, and a local FSE that is logically located in the MAC sublayer of the
3 source non-PC station, the source non-PC station receiving the management frame and
4 passing the information contained in the management frame to the local QME,

5 wherein the source non-PC station receives the management frame and passes
6 the information contained in the management frame to the local QME of the non-PC station,
7 the local QME of the non-PC station instructing the local FSE of the non-PC station to
8 update the entry corresponding to the VSS in a frame scheduling table of the FSE by
9 changing at least one QoS parameter value associated with the VSS based on the information
10 contained in the received management frame.

1 25. The PC station according to claim 18, wherein the DSBM detects a third
2 Path/Resv message, the third Path/Resv message originating outside the DSBM and
3 requesting that a side-stream session be terminated, the DSBM extracting the classifier from
4 the third Path/Resv message for the session,

5 wherein the QME of the PC station finds the VSID that is associated with the
6 extracted classifier, the QME of the PC station instructing the FSE of the PC station to delete
7 the entry corresponding to the VSS in the frame scheduling table, and

8 wherein the PC station sends a management frame to the non-PC station
9 sourcing the VSS defined by the VSID, the management frame including information relating
10 to a teardown of the VSS.

1 26. The PC station according to claim 25, wherein the non-PC station sourcing
2 the VSS includes a local QME, a local FCE that is logically located in the LLC sublayer of
3 the source non-PC station and a local FSE that is logically located in the MAC sublayer of
4 the source non-PC station, the source non-PC station receiving the management frame and
5 passing the information contained in the management frame to the local QME,

6 wherein the non-PC station sourcing the VSS receives the management frame
7 and passes the information contained in the management frame to the local QME of the non-
8 PC station,

9 wherein the local QME of the non-PC station instructs the local FCE of the
10 non-PC station to delete the entry corresponding to the VSS in the frame classification table,
11 and

12 wherein the local QME of the non-PC station instructs the local FSE of the
13 non-PC station to delete the entry corresponding to the VSS in the frame scheduling table.

1 27. The PC station according to claim 25, wherein the PC station sends a third
2 management frame to each destination non-PC station in the BSS, the third management
3 frame including information relating to a teardown of the VSS defined by the VSID.

1 28. The PC station according to claim 25, wherein the DSBM detects a timeout
2 event at the DSBM, the timeout event being triggered by a predetermined length of time
3 elapsing and not receiving one of the first Path/Resv message and the second Path/Resv
4 message for a side-stream session, the DSBM extracting the classifier from one of the first
5 Path/Resv message and the second Path/Resv message previously received for the side-
6 stream session,

7 wherein the QME of the PC station finds the VSID that is associated with the
8 extracted classifier, and instructs the FSE of the PC station to delete the entry corresponding
9 to the VSS in the frame scheduling table, and

10 wherein the PC station sends a management frame to the non-PC station

11 sourcing the VSS defined by the VSID, the management frame including information relating
12 to a teardown of the VSS.

1 29. The PC station according to claim 28, wherein the non-PC station sourcing
2 the VSS includes a local QME, a local FCE that is logically located in the LLC sublayer of
3 the source non-PC station and a local FSE that is logically located in the MAC sublayer of
4 the source non-PC station, the source non-PC station receiving the management frame and
5 passing the information contained in the management frame to the local QME,
6 wherein the non-PC station sourcing the VSS receives the management frame
7 and passes the information contained in the management frame to the local QME of the non-
8 PC station,
9 wherein the local QME of the non-PC station instructs the local FCE of the
10 non-PC station to delete the entry corresponding to the VSS in the frame classification table,
11 and
12 wherein the local QME instructs the local FSE of the non-PC station to delete
13 the entry corresponding to the VSS in the frame scheduling table.

1 30. The PC station according to claim 29, wherein the PC station sends a third
2 management frame to each destination non-PC station in the BSS, the third management
3 frame including information relating to a teardown of the VSS defined by the VSID.

1 31. The PC station according to claim 17, wherein before DSBM detects the Resv
2 message, the DSBM receives the first Path message for the side-stream session, the first Path
3 message being sent from a subnet bandwidth manager (SBM) of the source non-PC station in
4 the BSS, the SBM being part of the QME in the non-PC station;

5 wherein the DSBM propagates the first Path message for the side-stream
6 session to an RSVP agent of each destination station, the RSVP agent being an SBM when
7 the destination station is a non-PC station in the BSS,

8 wherein the DSBM receives the first Resv message for the side-stream
9 session, the first Resv message being sent from an RSVP agent of a destination station, the
10 RSVP agent being an SBM when the destination station is a non-PC station in the BSS, and

11 wherein after the DSBM determines whether to admit the side-stream session
12 to the network, the DSBM sends the first Resv message for the session to the SBM of the
13 source non-PC station in the BSS.

1 32. The PC station according to claim 17, wherein the wireless network is a
2 wireless local area network (WLAN).

ABSTRACT OF THE DISCLOSURE

A method and a system are disclosed for setting up, modifying and tearing down a side-stream communication session in a basic service set (BSS) in a wireless network so that the communication session has a defined Quality of Service (QoS). Regarding setting up a

5 side-stream communication session, a first Path message and a first Resv message (Path/Resv message) of a RSVP protocol is detected at a designated subnet bandwidth manager (DSBM) in a station having a point coordinator (PC). The first Resv message originates from a RSVP agent of a destination non-PC station in the BSS and requests resource reservation for setting up a side-stream session between a source non-PC station and

10 at least one destination non-PC station in the same BSS. The DSBM extracts a QoS parameter set and a classifier from the first Path/Resv message for the session. The DSBM the determines whether to admit the side-stream session to the network based on the QoS parameter set defining the session and a channel status report on a medium access control (MAC) sublayer of the BSS. When the side-stream session is admitted, a QoS management

15 entity (QME) of the PC station sets up a virtual side-stream (VSS) between the source non-PC station and the at least one destination non-PC station for transporting the side-stream session traffic. The DSBM is part of the QME in the PC station.

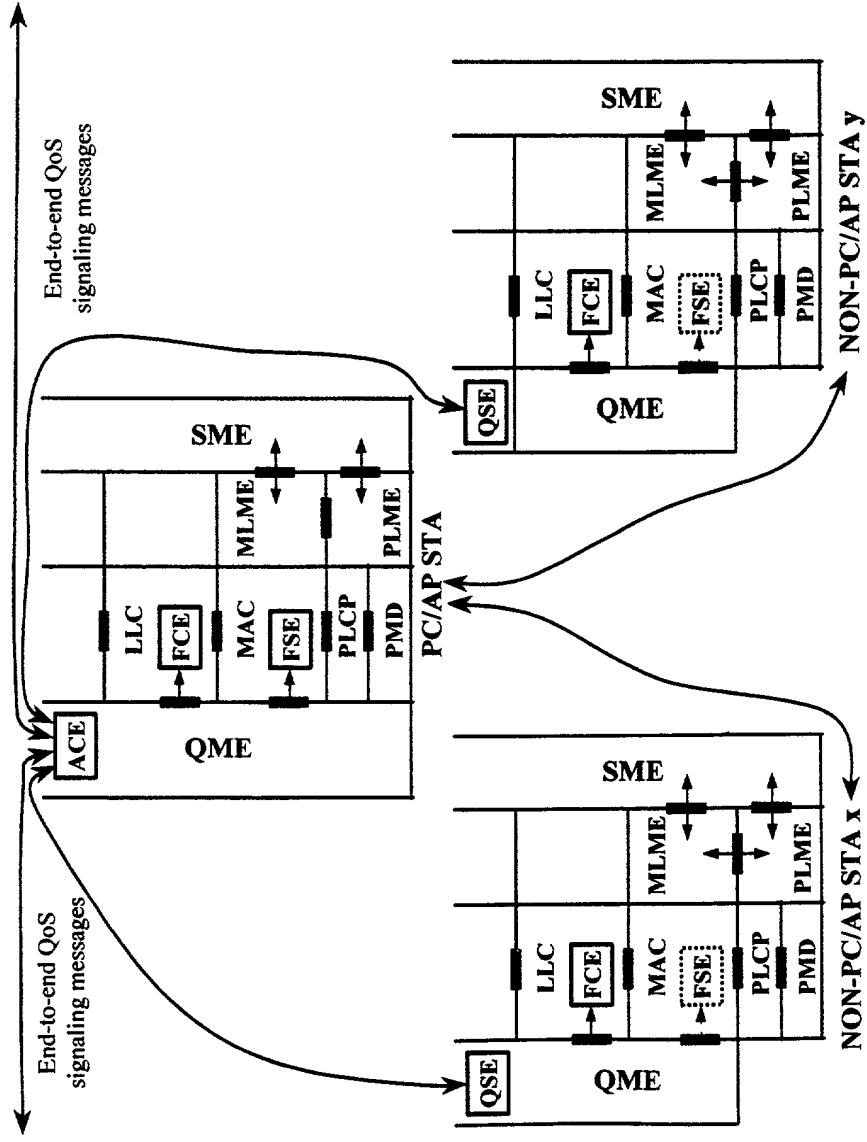


Figure 1

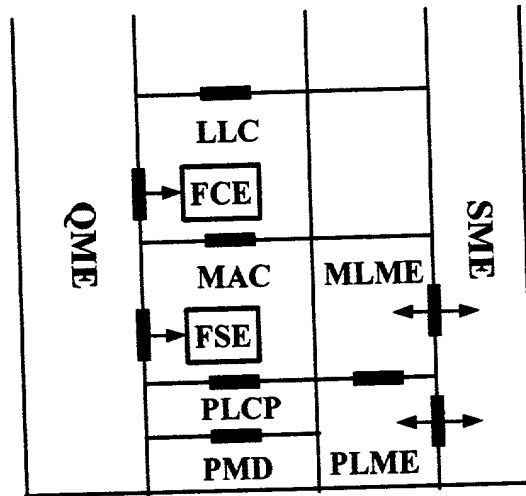


Figure 2

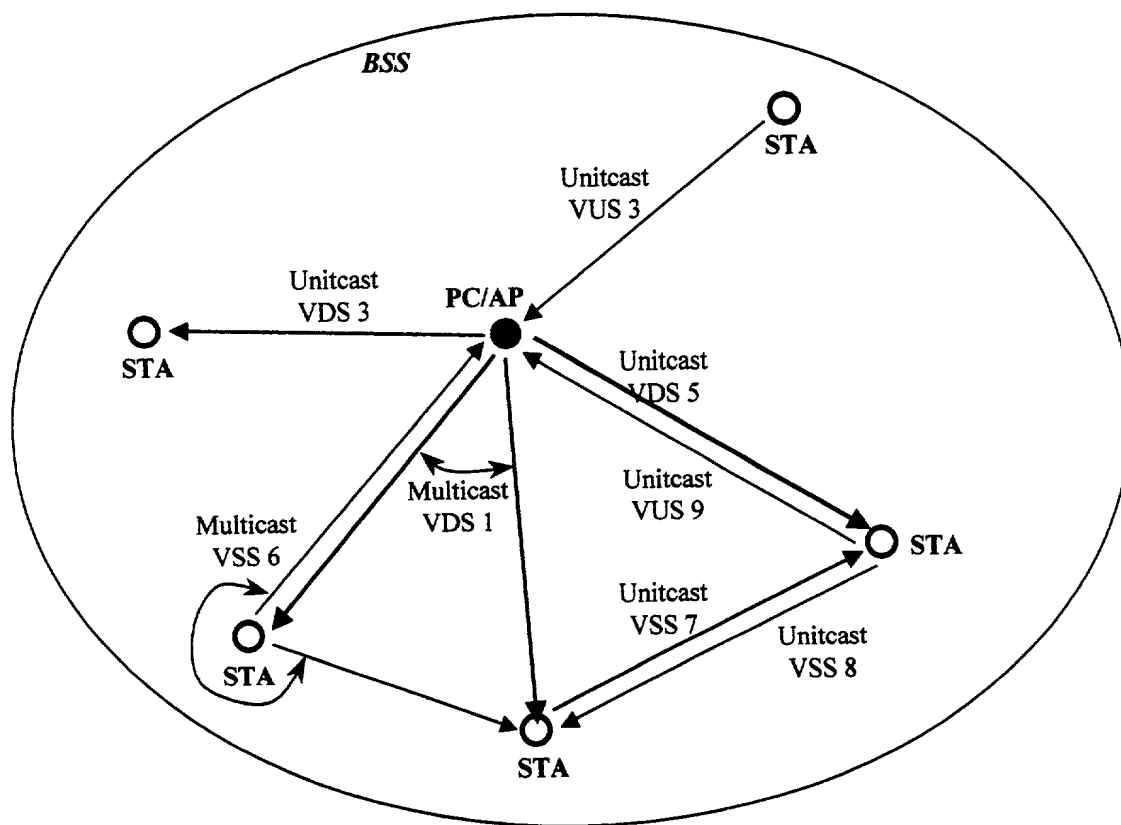


Figure 3

request bandwidth for a new session/application

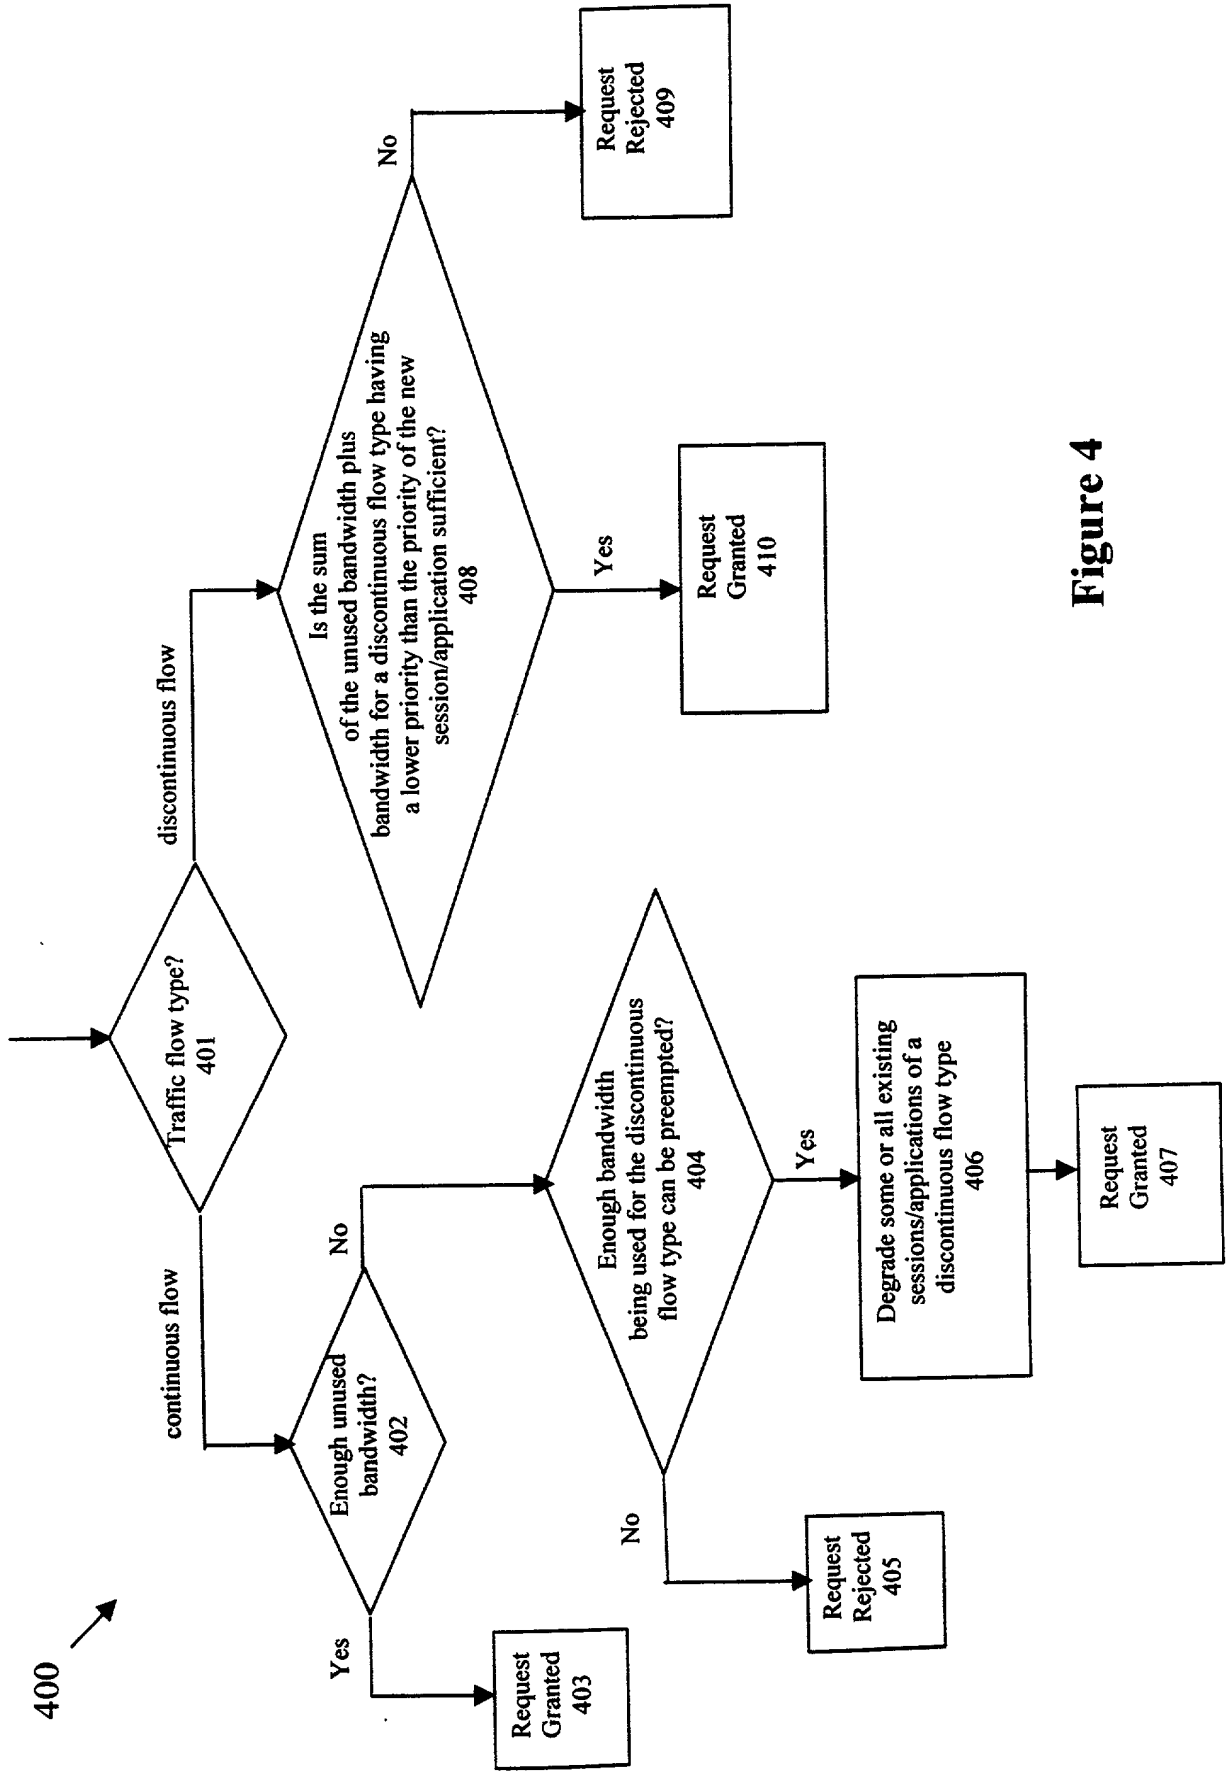


Figure 4

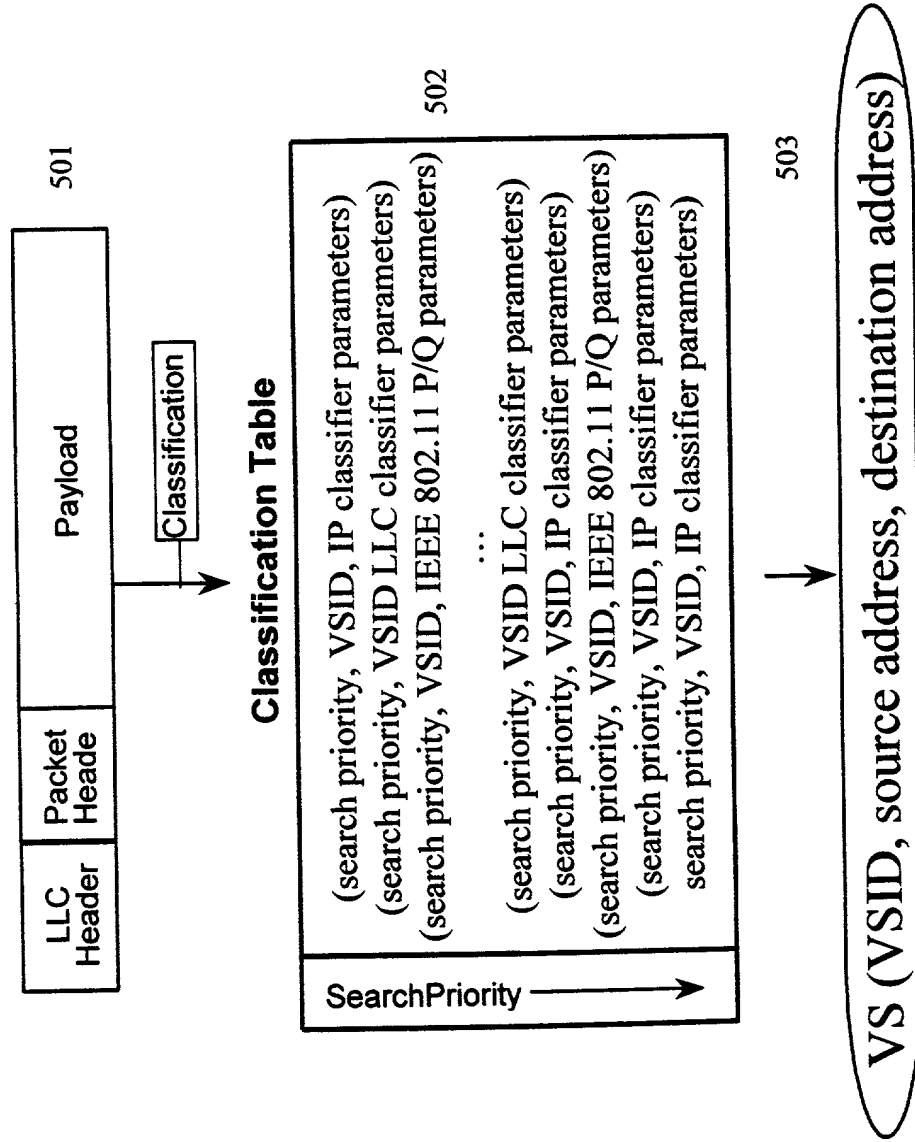


Figure 5

Scheduling Table

<div> <div>Descending Priorities</div> <div>↓</div> </div>	(VDS VSID, QoS parameter values, data size)
	(VUS VSID, QoS parameter values, data size)
	(VSS VSID, QoS parameter values, data size)
	...
	(VUS VSID, QoS parameter values, data size)
	(VUS VSID, QoS parameter values, data size)
	(VSS VSID, QoS parameter values, data size)
	(VDS VSID, QoS parameter values, data size)
	(VDS VSID, QoS parameter values, data size)

Figure 6

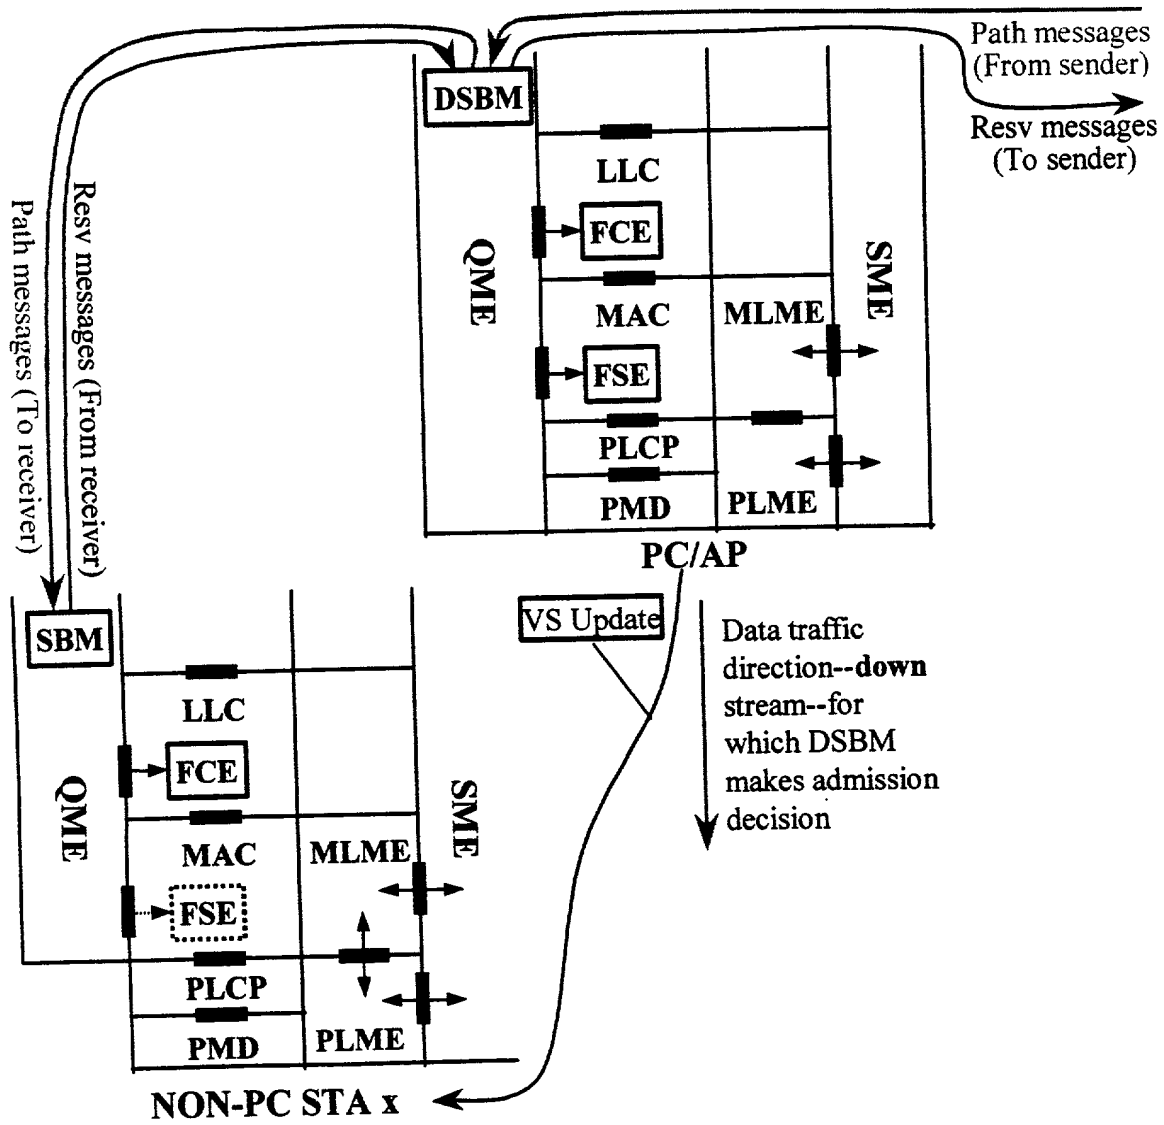


Figure 7

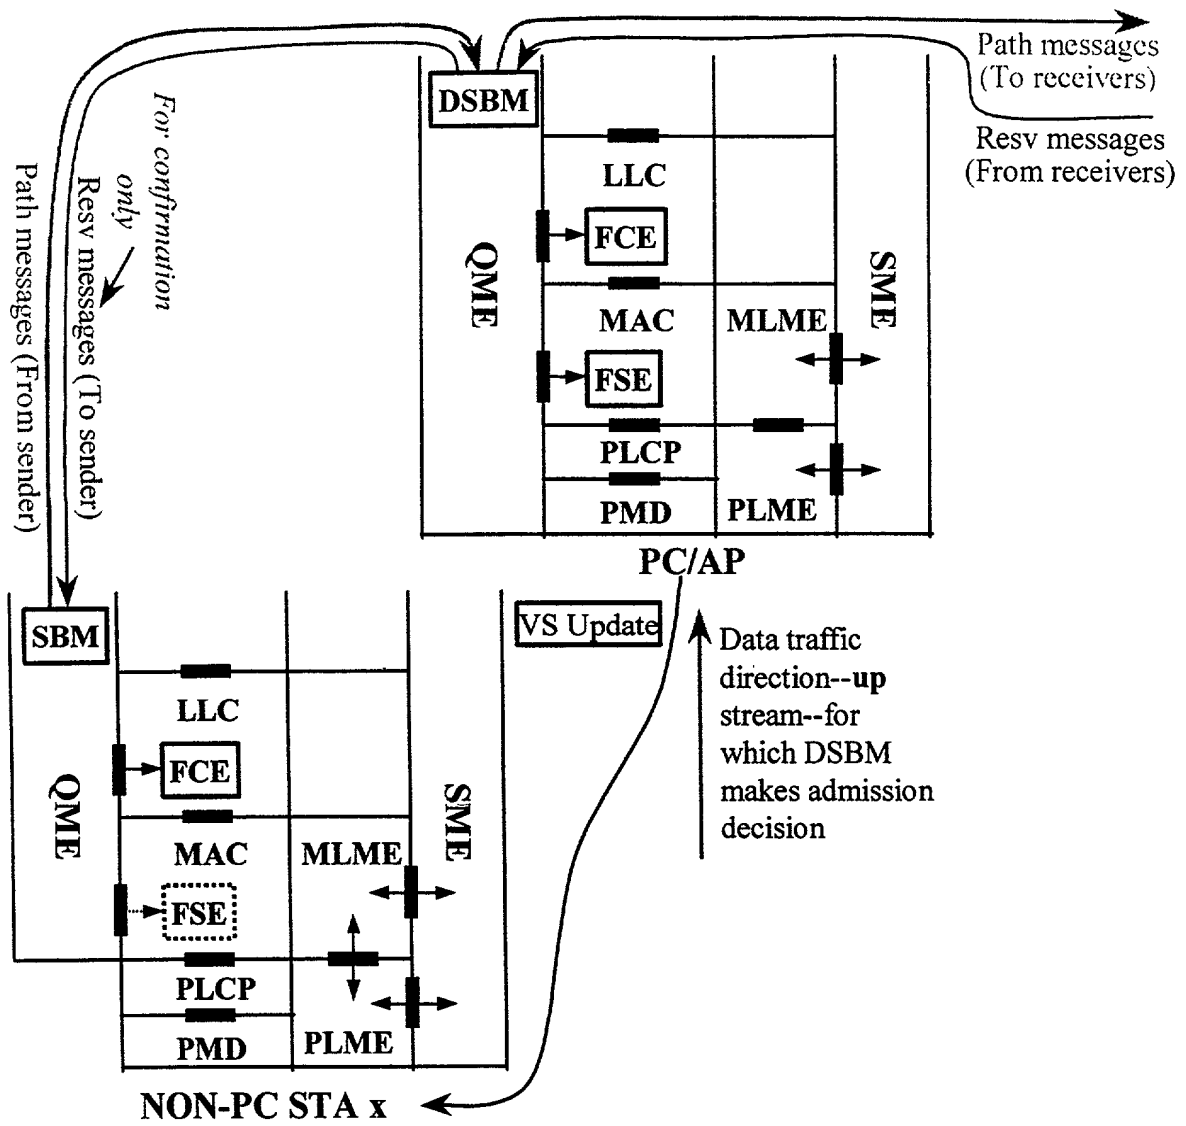


Figure 8

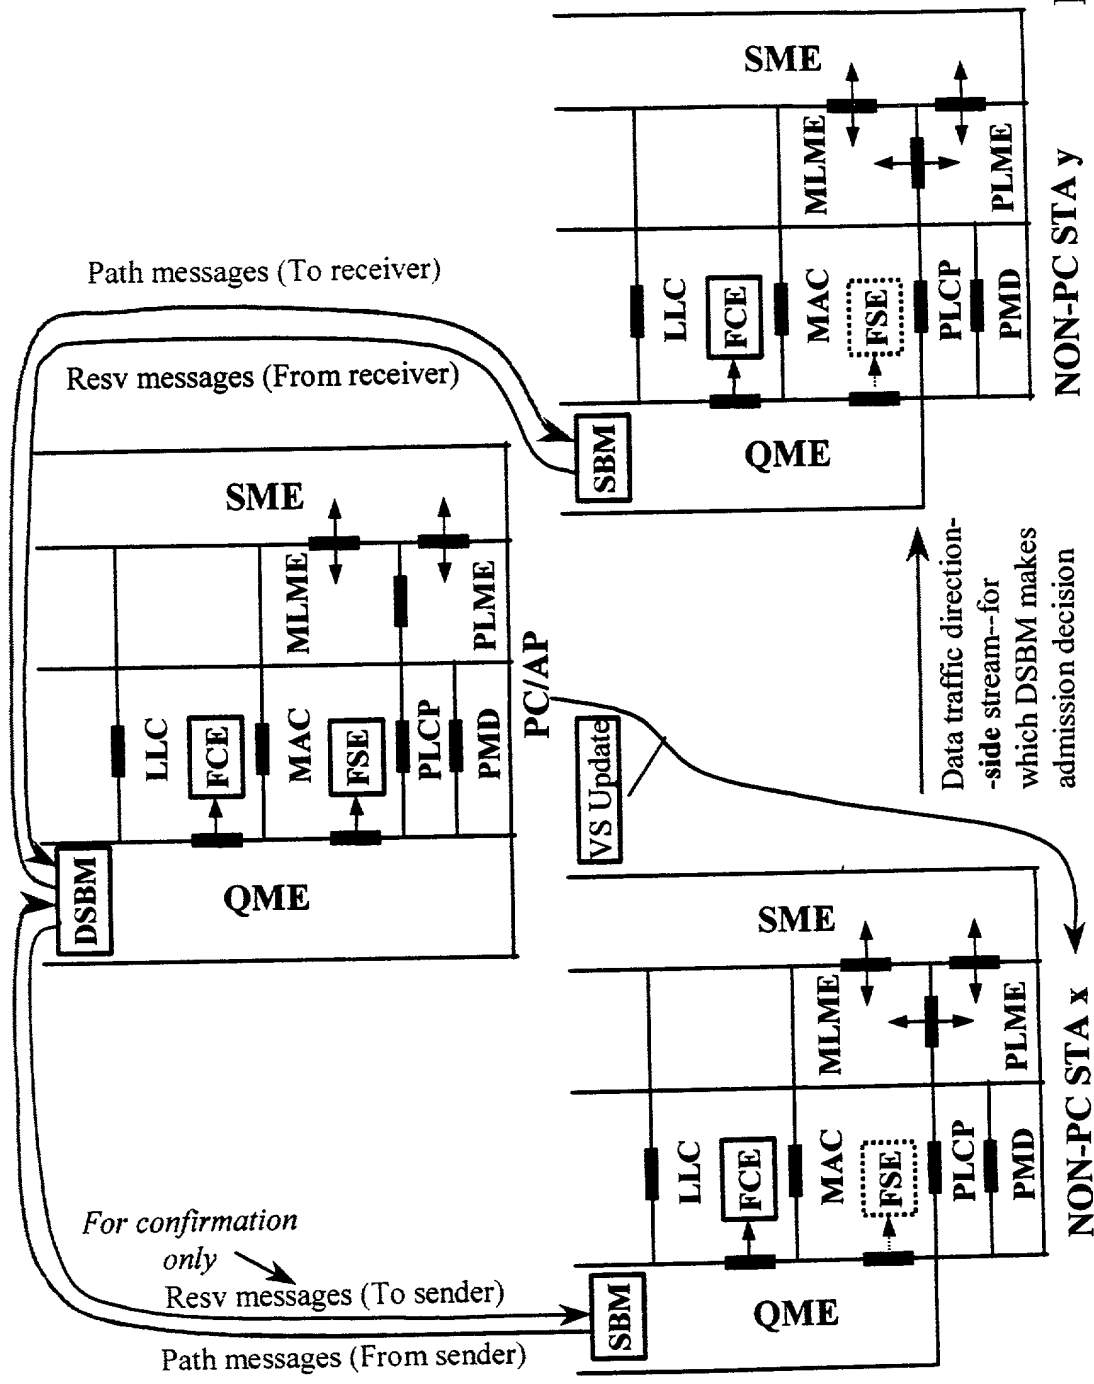


Figure 9

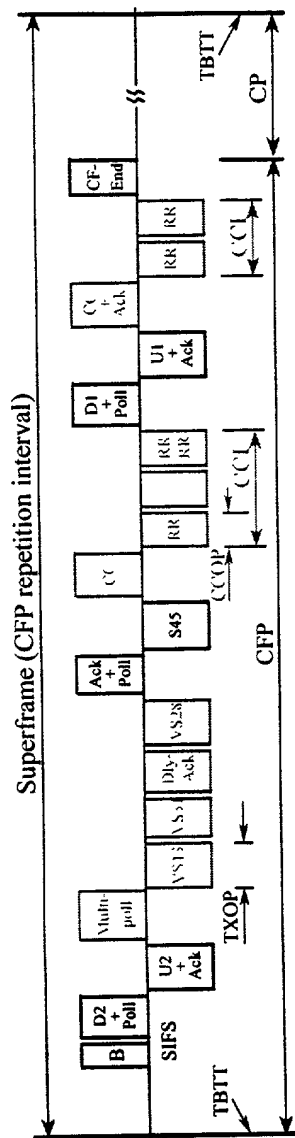


Figure 10

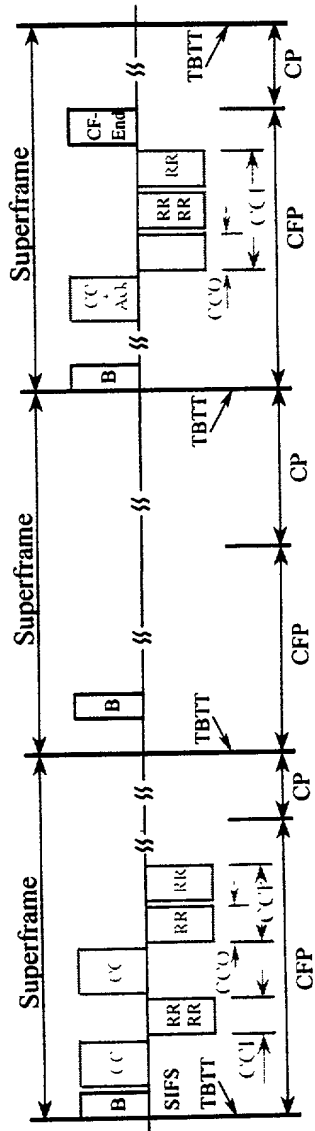


Figure 11a

Contention Control (CC) frame

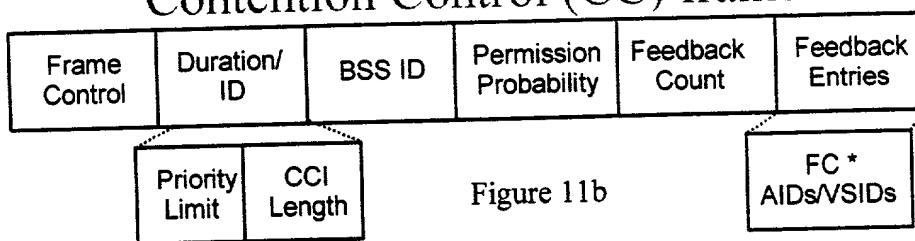


Figure 11b

Reservation Request (RR) frame

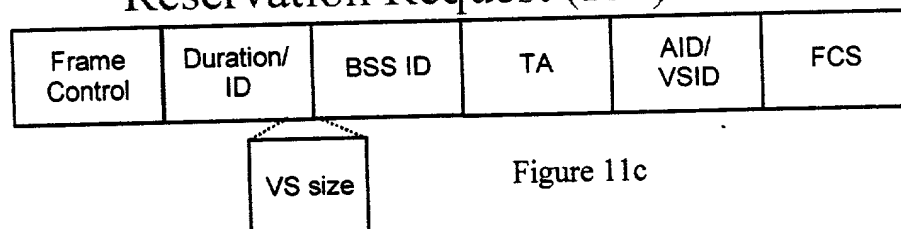


Figure 11c

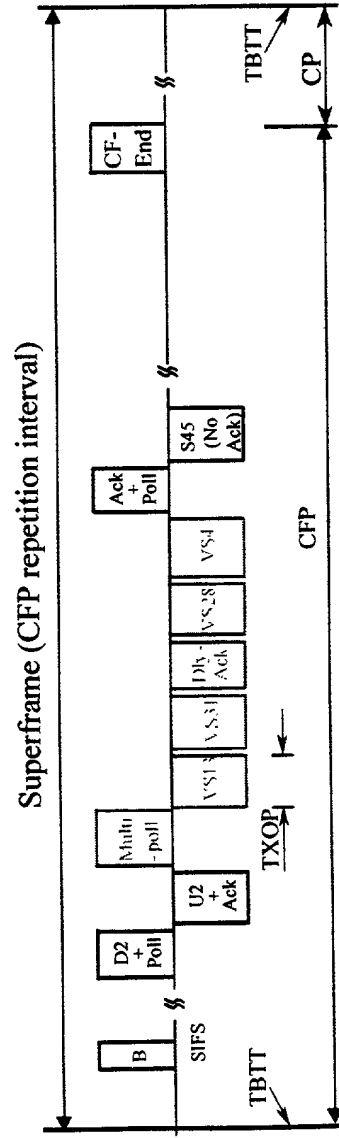


Figure 12a

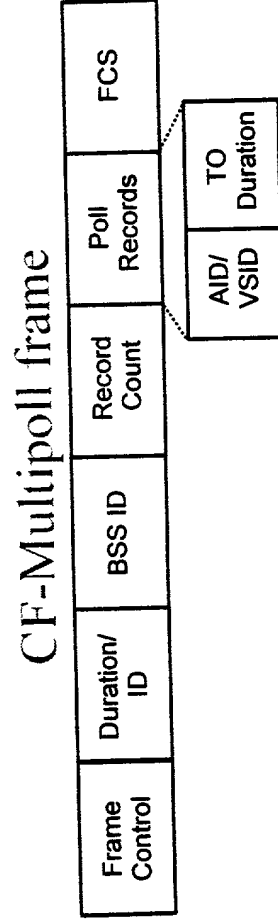


Figure 12b

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As below named inventors, We hereby declare that:

Our residence, post office addresses and citizenships are as stated below next to our names.

We believe we are the joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled RSVP/SBM BASED SIDE-STREAM SESSION SETUP, MODIFICATION, AND TEARDOWN FOR QoS-DRIVEN WIRELESS LANS, the specification of which is attached hereto.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

We acknowledge the duty to disclose all information known to us which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventors' certificate listed below and have also identified below any foreign application for patent or inventors' certificate having a filing date before that of the application on which priority is claimed:

None

We hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, we acknowledge the duty to disclose all information known to us to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

03517440-071400

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

We hereby appoint the following attorneys with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:


Samuel H. Dworetsky	(Reg. No. 27873)
Thomas A. Restaino	(Reg. No. 33444)
Michele L. Conover	(Reg. No. 34962)
Benjamin S. Lee	(Reg. No. 42787)
Robert B. Levy	(Reg. No. 28234)
Alfred G. Steinmetz	(Reg. No. 22971)
Cedric G. DeLaCruz	(Reg. No. 36498)
Rohini K. Garg	(Reg. No. 45272)
Susan E. McHale	(Reg. No. 35948)

We also appoint Thomas H. Jackson (Reg. No. 29808) and Joseph P. Curtin (Reg. No. 34571) of Banner & Witcoff as associate attorneys, with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the U.S. Patent and Trademark Office connected therewith.

Please address all correspondence to Mr. S. H. Dworetsky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748. Telephone calls should be made to Alfred G. Steinmetz by dialing 973-360-8113.

Full name of 1st joint inventor: Jin-Meng Ho

Inventor's signature

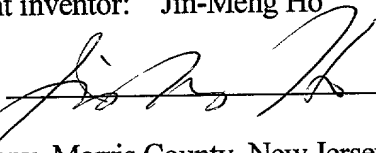

Date 7/13/2000

Residence: Parsippany, Morris County, New Jersey

Citizenship: U.S.

Post Office Address: 5 Carroll Court
Parsippany, New Jersey 07054

004420"04427950

Inventor's signature Wei Lin Date 7/13/2000

Citizenship: U. S.

Post Office Address: 30 Elliot Road
Parsippany, New Jersey 07054